

System Reset (battery back-up) Monolithic IC MM1290

Outline

These ICs protect S-RAM data in back-up mode (CS signal makes S-RAM CE pin low and \overline{CE} pin high) when power supply voltage goes below a certain set voltage (detection voltage 4.6V typ.). Further, it switches from main power supply to battery back-up when power supply voltage drops. Conversely, when power supply rises, it first switches the S-RAM from battery back-up to main power supply (switching voltage 3.5V typ.), then from back-up mode to normal mode (CS signal makes S-RAM CE pin high and \overline{CE} pin low). These signal processes provide reliable protection against data damage.

Features

1. Power supply switching circuit (switching between main power supply and battery)
2. CS control for S-RAM (normal mode : S-RAM can be accessed, back-up mode: S-RAM can not be accessed low current consumption mode)
3. Back-up output V01 and V02 output circuit built in.

Characteristics

1. Battery back-up			
1. Low IC current consumption (loss current)		$I_o = 100\mu A$	2.7 μA typ.
2. Drop voltage inside IC (input/output voltage difference)			0.03V typ.
3. Reverse current (reverse leak current)			0.5 μA max.
2. Normal operation			
1. Drop voltage inside IC (input/output voltage difference)		$I_o = 50mA$	0.2V typ.
2. Output voltage	$V_{cc} = 6V$	$I_{o1} = 50mA$	5.0V typ.
3. Output voltage2	$V_{cc} = 6V$	$I_{o2} = 30mA$	5.0V typ.
3. Detection voltage	<u>RESET</u>	A : 2.55V typ.	
	<u>PREEND</u>	B : 2.70V typ.	


Package

SOP-8A

Applications


1. Memory cards (S-RAM cards)
2. PCs, word processors
3. Fax machines, photocopiers, other office equipment
4. Sequence controllers, other FA equipment
5. Video games and other equipment with S-RAMs

Pin Assignment

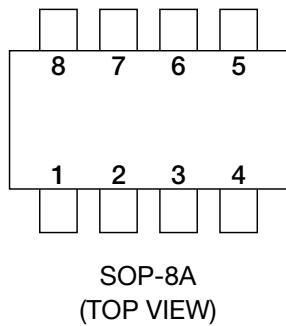

Pin no.	Pin name
1	GND
2	PREEND
3	V _{BAT}
4	CS
5	RESET
6	V _{O1}
7	V _{IN}
8	V _{O2}

Block Diagram

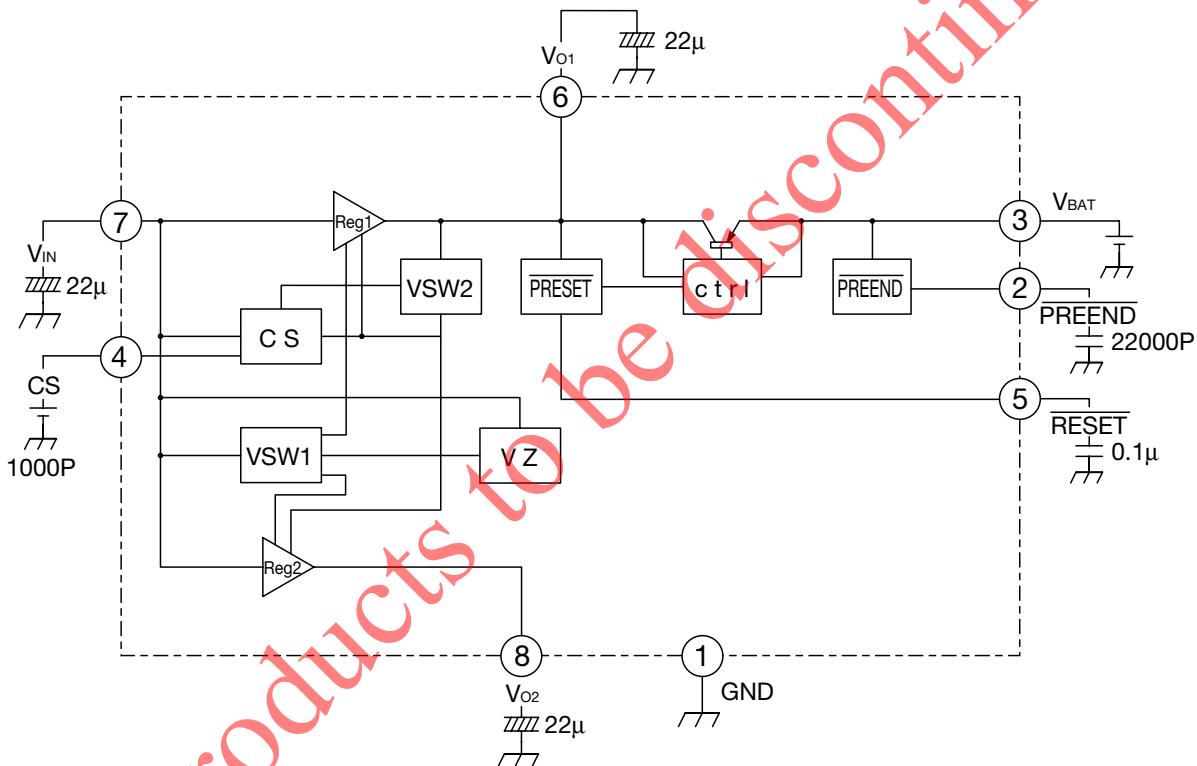

Recommended Operating Conditions

Item	Symbol	Rating	Unit
Storage temperature	T _{STG}	-40~+125	°C
Operating temperature	T _{OPL}	-20~+75	°C
Allowable loss	P _d	300	mW

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Rating	Unit
Power supply voltage 1	V _{IN} max.	-0.3~+16	V
Power supply voltage2 (BACK UP)	V _{BAT} max.	-0.3~+12	V
Pin Voltage	V _I max.	-0.3~+10	V
Output current 1	I _{O1}	0~80	mA
Output current 2	I _{O2}	0~60	mA

Electrical Characteristics (Except where noted otherwise, V_{IN}=6.0, Ta=25°C)

Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Unit
Synthesis						
Current consumption 1	I _{IN}	V _{IN} =6V	40	80	80	µA
Current consumption 2	I _{BAT1}	V _{BAT} =3V, V _{IN} =6V	0.3	0.6	0.6	µA
Current consumption 3	I _{BAT2}	V _{BAT} =3V Ta=25°C	2.7	4.5	4.5	µA
Regulator						
Output voltage1	V _{O1}	V _{IN} =6V, I _{O1} =50mA	4.85	5.0	5.15	V
Input-Output differential Voltage1	V _{IO1}	V _{IN} =6V, I _{O1} =50mA	0.2	0.35	0.35	V
Load Regulation1	ΔV _{O1}	I _{O1} =0~50mA	±0.01	±0.03	±0.03	%/mA
Line Regulation1	ΔV _{I1}	I _{O1} =50mA	±0.01	±0.2	±0.2	%/V
V _{OUT} Temperature Coefficient1	ΔV _{O1} ΔT _a	Ta=-20~+75°C	±0.01			%/°C
Output voltage2	V _{O2}	V _{IN} =V _O +1V, I _{O2} =30mA	4.85	5.0	5.15	V
Input-Output differential Voltage2	V _{IO2}	V _{IN} =4.5V, I _{O2} =30mA	0.2	0.35	0.35	V
Load Regulation2	ΔV _{O2}	I _{O2} =0~30mA	±0.01	±0.03	±0.03	%/mA
Line Regulation2	ΔV _{I2}	I _{O2} =30mA	±0.01	±0.2	±0.2	%/V
V _{OUT} Temperature Coefficient2	ΔV _{O2} ΔT _a	Ta=-20~+75°C	±0.01	±0.20	±0.20	%/°C
Reset						
CS detection voltage	V _{SL1}	V _{IN} =H→L	4.485	4.600	4.715	V
Detection voltage temperature coefficient 1	ΔV _{g1} ΔT _a	Ta=-20~+75°C		±0.01		%/°C
CS sync current	I _{SINK1}	V _O =0.5V, V _{IN} =V _{BAT} =2V	1.5			mA
CS operating voltage	V _{OPL1}	V _{IN} or V _{BAT} I _{Cs} =50µA, V _{OP} =0.4V	1.6		16	V
RESET detection voltage	V _{SL2}	V _{O1} =H→L	2.499	2.550	2.601	V
RESET hysteresis	ΔV _{S2}	V _{O1} =H→L→H	45	90	180	mV
Detection voltage temperature coefficient 2	ΔV _{SL2} ΔT _a	Ta=-20~+75°C		±0.01		%/°C
RESET sync current	I _{SINK2}	V _{OP} =0.4V, V _{IN} =V _{BAT} =2V	1.5			mA
PREEND detection voltage	V _{SL3}	V _{BAT} =H→L	2.646	2.700	2.754	V
PREEND hysteresis	ΔV _{S3}	V _{BAT} =H→L→H	110	140	250	mV
Detection voltage temperature coefficient 3	ΔV _{S3} ΔT _a	Ta=-20~+75°C		±0.01		%/°C
PREEND sync current	I _{SINK3}	V _{OP} =0.4V, V _{IN} =V _{BAT} =2V	1.5			mA
RESET, PREEND operating voltage	V _{OPL2}	V _{IN} or V _{BAT} V _{OP} =0.4V I _R =I _P =50µA	1.6		16	V

Electrical Characteristics

(Except where noted otherwise, $V_{IN}=6.0$, $T_a=25^\circ C$)

Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Unit
Switch						
Switch voltage	V_{SW1}	$V_{BAT}=3V$, V_{IN} voltage detection	3.400	3.500	3.600	V
CS output prohibition voltage	V_{SW2}	$V_{BAT}=3V$, V_{O1} voltage detection	4.550	4.700	4.850	V
V_{BAT} SW Leakage Current	I_{LEAK}	$V_{IN}=6V$, $V_{BAT}=0V$			0.5	μA
Input-Output differential Voltage	V_{IOSW}	$V_{IN}=OPEN$, $V_{BAT}=2.65V$, $I_{OUT}=100\mu A$		30	60	mV
Switch Temperature Coefficient	$\frac{\Delta V_{SW1}}{\Delta T_a}$	$T_a=-20 \sim +75^\circ C$		± 0.01		%/ $^\circ C$
CS voltage prohibition Temperature Coefficient	$\frac{\Delta V_{SW2}}{\Delta T_a}$	$T_a=-20 \sim +75^\circ C$		± 0.01		%/ $^\circ C$

Timing Chart

