


Common mode Choke Coil

CMT Series

OUTLINE

Low loss common mode choke coil for reducing the common mode noise in automobile signal line.

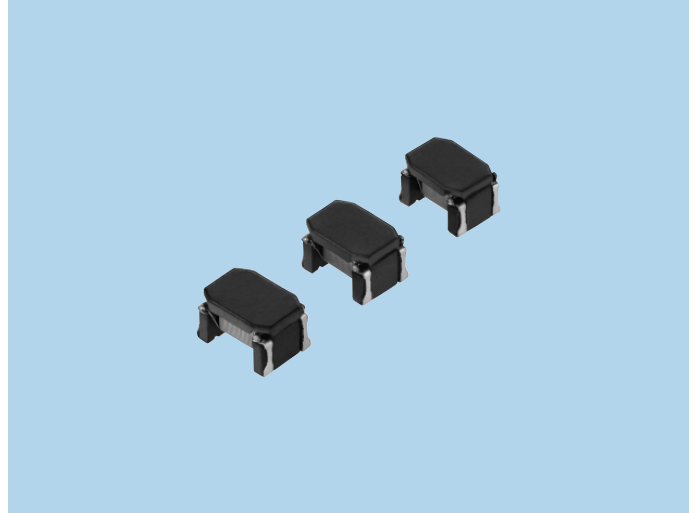

FEATURES

1. Low insertion and return loss.
2. Non-Solder product by laser welding.
3. Operating temperature range : -40~+150°C
4. Laser marking.

APPLICATIONS

Automobile signal line such as CAN-bus, Flex-ray system.

SPECIFICATIONS

Type	Size (mm)	Height (mm)	Common Mode Inductance (μH) +50% -30%	Common Mode Impedance (Ω) min. at 10MHz	DCR (Ω) max.	Pcs/Reel
CMT-453230NX	4.5×3.2	3.0 max.	11	300	0.4	2500
			22	500	0.5	2500
			51	1000	0.8	2500

DIMENSIONS

