

# Adjustable Type Coils S Type Series

Coils, Filters

## S4-S




### Specifications

- (1) 0.03~1 $\mu$ H
- (2) 30~200MHz
- (3) F: $\pm$ 1.5%  
L: $\pm$ 3%
- (4) -
- (5) 40~60

### Features

- SMD
- 1000pcs./Reel

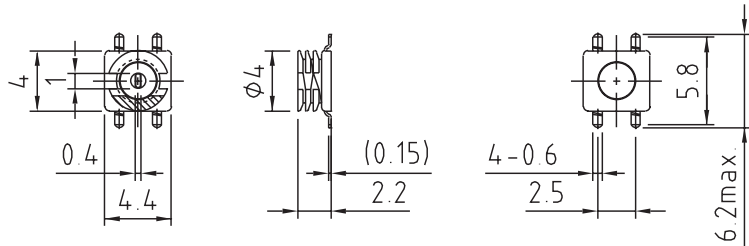

## S4-S2




### Specifications

- (1) 0.03~1 $\mu$ H
- (2) 30~200MHz
- (3) F: $\pm$ 1.5%  
L: $\pm$ 3%
- (4) -
- (5) 40~60

### Features

- SMD
- 1000pcs./Reel

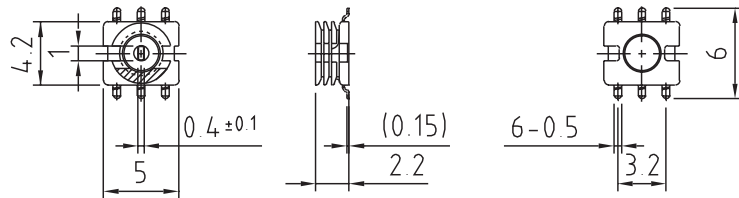

## S5-C




### Specifications


- (1) 0.02~0.2 $\mu$ H
- (2) 30~200MHz
- (3) L: $\pm$ 3%
- (4) -
- (5) 50~130

### Features

- Ferrite or aluminum core used
- Can be used also shielded case.

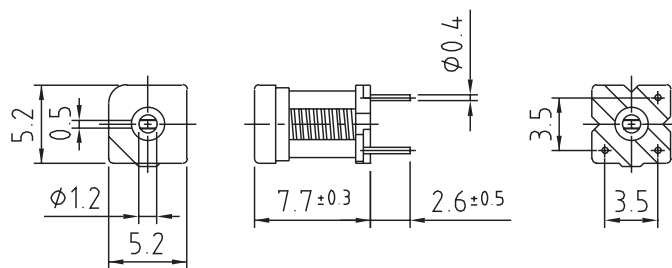

## S7-T4

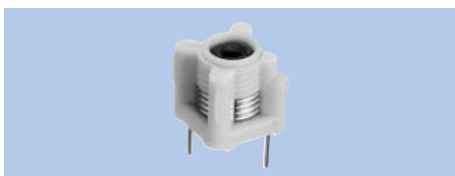


### Specifications

- (1) 0.03~0.25 $\mu$ H
- (2) 20~200MHz
- (3) F: $\pm$ 2%  
L: $\pm$ 4%
- (4) -
- (5) 60~100


### Features

- Ferrite or aluminum core used.
- Can be used also shielded case.

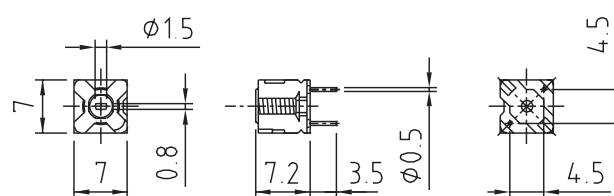


- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q

S7-T3

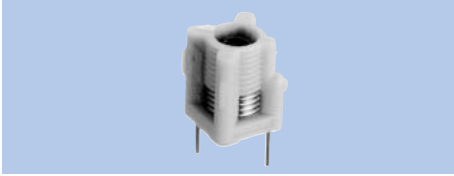

- Specifications**
- (1) 0.03~0.5μH
  - (2) 20~200MHz
  - (3) F:±2%  
L:±5%
  - (5) 60~120

**Features**  
 Ferrite or aluminum core used.  
 Can be used also shielded case.

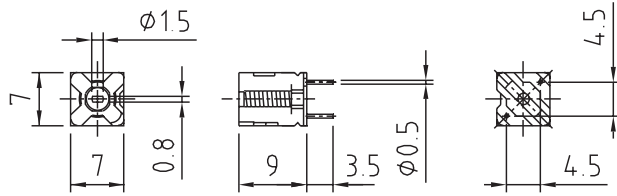

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q