


Adjustable Coils SMD Type K Series

K5-S2

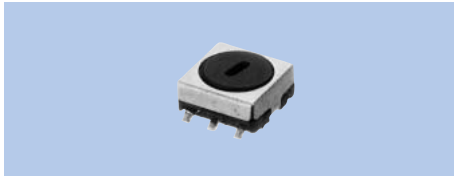


Specifications

- (1) 1~300 μ H
- (2) 0.1~20MHz
- (3) F: \pm 2%
L: \pm 4%
- (4) -
- (5) 40~70

Features

- SMD
- 1,000pcs./Reel

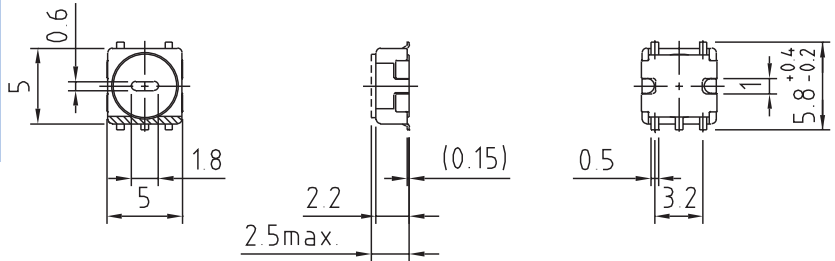

K5-N2




Specifications

- (1) 0.1~14mH
- (2) 100~500kHz
- (3) - (Exclusively for preset)
- (4) -
- (5) 10~40

Features

- SMD
- 1,000pcs./Reel

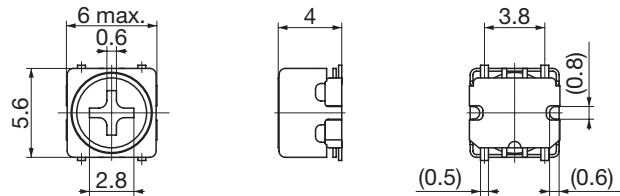

K5-N1




Specifications

- (1) 1~1,200 μ H
- (2) 0.1~20MHz
- (3) F: \pm 2%
L: \pm 5%
- (4) 5~15,000pFx 2
- (5) 50~80

Features

- SMD
- 1,000pcs./Reel

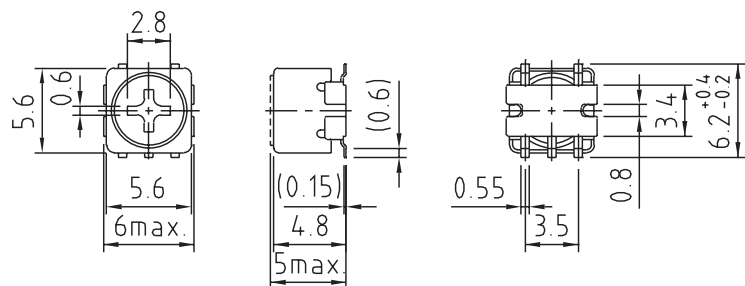

K5-N




Specifications

- (1) 1~5,900 μ H
- (2) 0.1~20MHz
- (3) F: \pm 2%
L: \pm 5%
- (4) 5~15,000pFx 2
- (5) 50~100

Features

- SMD
- 1,000pcs./Reel

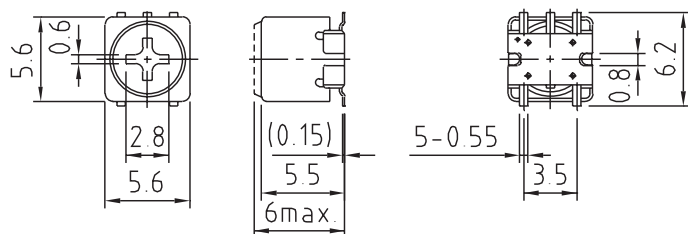

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q