
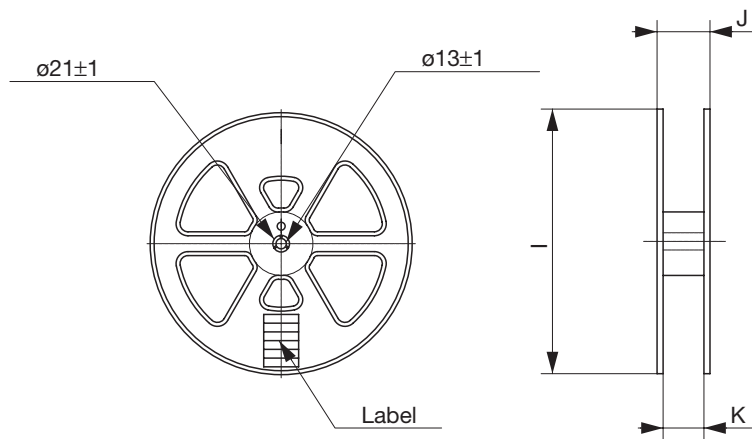
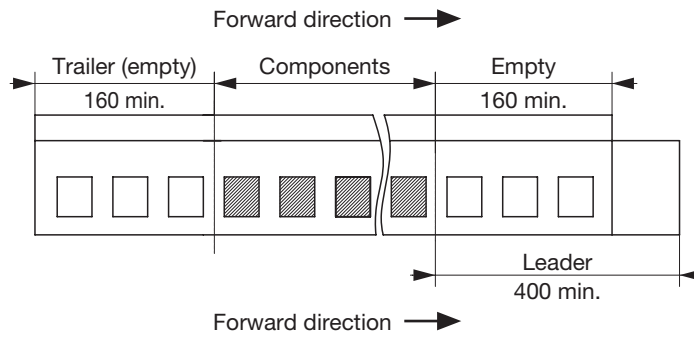


# SMD Products Taping Specification

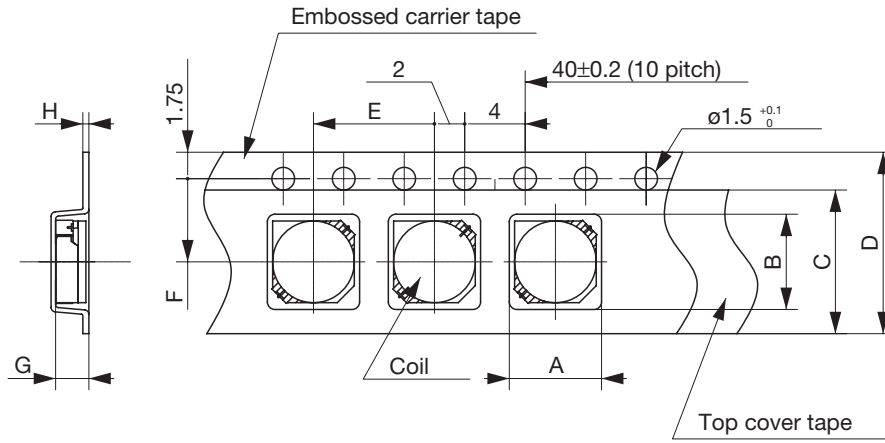

## SMD Products Taping Specification

|                 | Type      | Tape Dimensions (mm) |          |          |        |          |          |          |          | Reel Dimensions (mm) |        |        | Q' ty    |
|-----------------|-----------|----------------------|----------|----------|--------|----------|----------|----------|----------|----------------------|--------|--------|----------|
|                 |           | A                    | B        | C        | D      | E        | F        | G        | H        | I                    | J      | K      | Pcs/Reel |
| Power Inductors | C3-P1.0R  | (3.3)                | (3.3)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.3)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 4,000    |
|                 | C3-P1.2R  | (3.3)                | (3.3)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.5)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-P1.2RA | (3.3)                | (3.3)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.5)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-P1.5R  | (3.3)                | (3.3)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.7)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C4-P1.5R  | (4.2)                | (4.2)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.7)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C4-P1.8R  | (4.2)                | (4.2)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (2.1)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-Z1.2R  | (3.3)                | (3.3)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.5)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-Z1.5R  | (3.3)                | (3.3)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.7)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-Z1.8R  | (3.3)                | (3.3)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (2.1)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-Y1.2R  | (4.2)                | (4.2)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.4)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-Y1.5R  | (4.2)                | (4.2)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.7)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-Y1.8R  | (4.2)                | (4.2)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (2.1)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C3-Y2.0R  | (4.2)                | (4.2)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (2.1)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C4-Y1.2R  | (4.9)                | (4.9)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.5)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C4-Y1.5R  | (4.9)                | (4.9)    | 9.5±0.2  | 12±0.3 | 8.0±0.1  | 5.5±0.1  | (1.5)    | 0.3±0.05 | ø330±2               | 17.5±1 | 13.5±1 | 3,000    |
|                 | C4-K1.8R  | (5.3)                | (5.3)    | 9.5±0.2  | 12±0.3 | 8±0.1    | 5.5±0.1  | 2.2±0.2  | 0.3±0.1  | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|                 | C4-K1.8RA | (5.3)                | (5.3)    | 9.5±0.2  | 12±0.3 | 8±0.1    | 5.5±0.1  | 2.2±0.2  | 0.3±0.1  | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|                 | C4-K3L    | (5.3)                | (5.3)    | 9.5±0.2  | 12±0.3 | 8±0.1    | 5.5±0.1  | 3.2±0.2  | 0.3±0.1  | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|                 | C4-K3LA   | (5.3)                | (5.3)    | 9.5±0.2  | 12±0.3 | 8±0.1    | 5.5±0.1  | 3.2±0.2  | 0.3±0.1  | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|                 | C5-K1.8L  | (6.1)                | (6.1)    | 9.5±0.2  | 12±0.3 | 8±0.1    | 5.5±0.1  | 2.3±0.2  | 0.4±0.1  | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|                 | C5-K1.8LA | (6.1)                | (6.1)    | 9.5±0.2  | 12±0.3 | 8±0.1    | 5.5±0.1  | 2.3±0.2  | 0.4±0.1  | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|                 | C5-K3LGA  | (6.1)                | (6.1)    | 9.5±0.2  | 12±0.3 | 8±0.1    | 5.5±0.1  | 3.2±0.2  | 0.4±0.1  | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|                 | C6-K1.8L  | (7.2)                | (7.2)    | 13.5±0.2 | 16±0.3 | 12±0.1   | 7.5±0.1  | 2.2±0.2  | 0.3±0.1  | ø330±2               | 21.5±1 | 17.5±1 | 1,000    |
|                 | C6-K3LG   | (7.2)                | (7.2)    | 13.5±0.2 | 16±0.3 | 12±0.1   | 7.5±0.1  | 3.4±0.2  | 0.3±0.1  | ø330±2               | 21.5±1 | 17.5±1 | 1,000    |
|                 | C6-K5LGA  | (7.2)                | (7.2)    | 13.5±0.2 | 16±0.3 | 12±0.1   | 7.5±0.1  | 5.4±0.2  | 0.3±0.1  | ø330±2               | 21.5±1 | 17.5±1 | 500      |
|                 | C6-K5RA   | (7.2)                | (7.2)    | 13.5±0.2 | 16±0.3 | 12±0.1   | 7.5±0.1  | 5.3±0.2  | 0.4±0.1  | ø330±2               | 21.5±1 | 17.5±1 | 700      |
|                 | C8-K4L    | (8.7)                | (8.7)    | 21±0.2   | 24±0.3 | 16±0.1   | 11.5±0.1 | 4.1±0.2  | 0.4±0.1  | ø330±2               | 29.5±1 | 25.5±1 | 500      |
|                 | C8-K5L    | (8.7)                | (8.7)    | 21±0.2   | 24±0.3 | 16±0.1   | 11.5±0.1 | 5.1±0.2  | 0.4±0.1  | ø330±2               | 29.5±1 | 25.5±1 | 500      |
|                 | C8-K5LA   | (8.7)                | (8.7)    | 21±0.2   | 24±0.3 | 16±0.1   | 11.5±0.1 | 5.1±0.2  | 0.4±0.1  | ø330±2               | 29.5±1 | 25.5±1 | 500      |
|                 | C10-K3L   | (10.7)               | (10.7)   | 21±0.2   | 24±0.3 | 16±0.1   | 11.5±0.1 | 3.3±0.2  | 0.4±0.1  | ø330±2               | 29.5±1 | 25.5±1 | 500      |
|                 | C10-K4L   | (10.7)               | (10.7)   | 21±0.2   | 24±0.3 | 16±0.1   | 11.5±0.1 | 4.1±0.2  | 0.4±0.1  | ø330±2               | 29.5±1 | 25.5±1 | 500      |
|                 | C12-K4.5L | (13.6)               | (13.6)   | 21±0.2   | 24±0.3 | 16±0.1   | 11.5±0.1 | 4.5±0.2  | 0.4±0.1  | ø330±2               | 29.5±1 | 25.5±1 | 500      |
|                 | C12-K7.5L | (12.4)               | (12.4)   | 21±0.2   | 24±0.3 | 16±0.1   | 11.5±0.1 | 7.7±0.2  | 0.5±0.1  | ø330±2               | 29.5±1 | 25.5±1 | 400      |
| C13-K4.5L       | (12.1)    | (12.1)               | 21±0.2   | 24±0.3   | 16±0.1 | 11.5±0.1 | 4.5±0.2  | 0.4±0.1  | ø330±2   | 29.5±1               | 25.5±1 | 500    |          |
| C8-H5R          | (8.7)     | (8.7)                | 13.5±0.2 | 16±0.3   | 12±0.1 | 7.5±0.1  | (5.3)    | 0.4±0.05 | ø330±2   | 29.5±1               | 25.5±1 | 500    |          |
| C10-H3.5R       | (10.7)    | (10.7)               | 21±0.2   | 24±0.3   | 16±0.1 | 11.5±0.1 | 4.2±0.2  | 0.4±0.1  | ø330±2   | 29.5±1               | 25.5±1 | 800    |          |
| C10-H5R         | (10.7)    | (10.7)               | 21±0.2   | 24±0.3   | 16±0.1 | 11.5±0.1 | 5.3±0.2  | 0.4±0.1  | ø330±2   | 29.5±1               | 25.5±1 | 500    |          |

## SMD Products Taping Specification

|   | Type      | Tape Dimensions (mm) |         |          |        |         |          |         |         | Reel Dimensions (mm) |        |        | Q' ty    |
|---|-----------|----------------------|---------|----------|--------|---------|----------|---------|---------|----------------------|--------|--------|----------|
|   |           | A                    | B       | C        | D      | E       | F        | G       | H       | I                    | J      | K      | Pcs/Reel |
| Transformers  | C8-R4L    | (9)                  | (9.9)   | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | 4.2±0.2 | 0.4±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 1,000    |
|   | C8-R5L    | (9)                  | (9.9)   | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | 5.2±0.2 | 0.4±0.1 | ø380±2               | 21.5±1 | 17.5±1 | 1,000    |
|   | C8-R6L    | (9)                  | (9.9)   | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | 6.4±0.2 | 0.4±0.1 | ø380±2               | 21.5±1 | 17.5±1 | 1,000    |
|   | TR11-A-S  | (11.5)               | (13.6)  | 21±0.2   | 24±0.2 | 16±0.1  | 11.5±0.1 | 5.8±0.2 | 0.4±0.1 | ø330±2               | 29.5±1 | 25.5±1 | 500      |
|   | TR14-A-S  | (18)                 | (17.6)  | 25±0.2   | 32±0.3 | 24±0.1  | 14.2±0.1 | 7±0.2   | 0.5±0.1 | ø330±2               | 37.5±1 | 33.5±1 | 300      |
|   | C3-T2.5R  | (3.9)                | (3.9)   | 9.5±0.3  | 12±0.3 | 8±0.1   | 5.5±0.1  | 2.8±0.2 | 0.4±0.1 | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|   | C4-T2.5R  | (5)                  | (5)     | 9.5±0.2  | 12±0.3 | 8±0.1   | 5.5±0.1  | 2.8±0.2 | 0.4±0.1 | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|   | C5-T2.2R1 | (5.5)                | (5.5)   | 9.5±0.2  | 12±0.3 | 8±0.1   | 5.5±0.1  | 2.4±0.2 | 0.4±0.1 | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|   | C5-T2.5R1 | (5.5)                | (5.5)   | 9.5±0.2  | 12±0.3 | 8±0.1   | 5.5±0.1  | 2.7±0.2 | 0.4±0.1 | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
|   | C5-T3R1   | (5.5)                | (5.5)   | 9.5±0.2  | 12±0.3 | 8±0.1   | 5.5±0.1  | 3.2±0.2 | 0.4±0.1 | ø330±2               | 17.5±1 | 13.5±1 | 2,000    |
| C6-T2.2R  | (6.4)     | (6.4)                | 9.5±0.2 | 12±0.3   | 8±0.1  | 5.5±0.1 | 2.2±0.2  | 0.4±0.1 | ø330±2  | 17.5±1               | 13.5±1 | 2,000  |          |
| C6-T3R  | (6.4)     | (6.4)                | 9.5±0.2 | 12±0.3   | 8±0.1  | 5.5±0.1 | 3.2±0.2  | 0.4±0.1 | ø330±2  | 17.5±1               | 13.5±1 | 2,000  |          |
| Adjustable Coils<br>(Including Coils for Corner sensor) | K5-S2     | (5.6)                | (6.5)   | 9.5±0.2  | 12±0.3 | 8±0.1   | 5.5±0.1  | 3±0.2   | 0.4±0.1 | ø330±2               | 17.5±1 | 13.5±1 | 1,000    |
|   | K5-N1     | (6)                  | (6.6)   | 13.5±0.2 | 16±0.3 | 8±0.1   | 7.5±0.1  | 5.3±0.2 | 0.5±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 1,000    |
|   | K5-N      | (6)                  | (6.6)   | 13.5±0.2 | 16±0.3 | 8±0.1   | 7.5±0.1  | 6.5±0.2 | 0.5±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 1,000    |
|   | K5-N2     | (6)                  | (6.6)   | 13.5±0.2 | 16±0.3 | 8±0.1   | 7.5±0.1  | (5)     | 0.5±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 1,000    |
|   | K5-R2     | 9±0.2                | 9±0.2   | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | 8.5±0.2 | 0.4±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 500      |
|   | K5-R3     | (9.5)                | (10)    | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | (7.8)   | 0.4±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 500      |
|   | M5-NP     | (6.9)                | (6.9)   | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | (7.8)   | 0.4±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 500      |
|   | M5-N      | (6)                  | (6.6)   | 13.5±0.2 | 16±0.3 | 8±0.1   | 7.5±0.1  | 6.5±0.2 | 0.5±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 1,000    |
|   | K5-RS     | (9.5)                | (10)    | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | (7.8)   | 0.4±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 500      |
|   | K5-R4     | (9.9)                | (10.1)  | 13.5±0.2 | 16±0.3 | 12±0.1  | 7.5±0.1  | (8.2)   | 0.4±0.1 | ø330±2               | 21.5±1 | 17.5±1 | 500      |
| K7-R  | (11.4)    | (11.1)               | 21±0.2  | 24±0.3   | 16±0.1 | (11.5)  | (7.6)    | 0.4±0.1 | ø330±2  | 29.5±1               | 25.5±1 | 400    |          |