
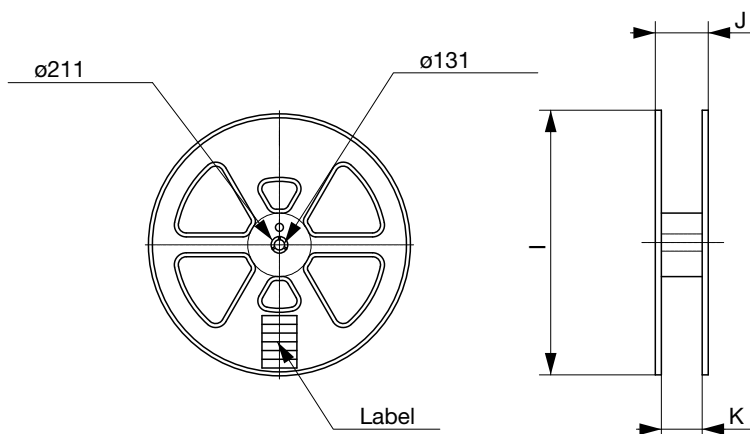
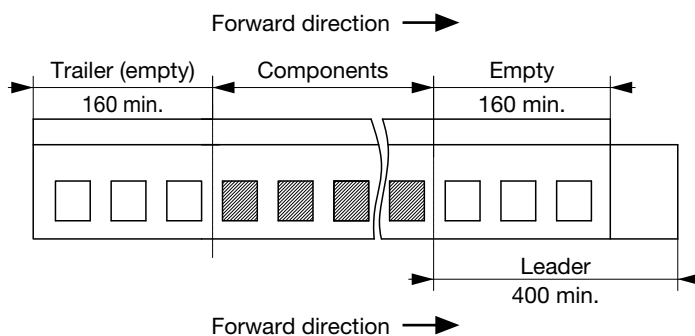


SMD Products Taping Specification

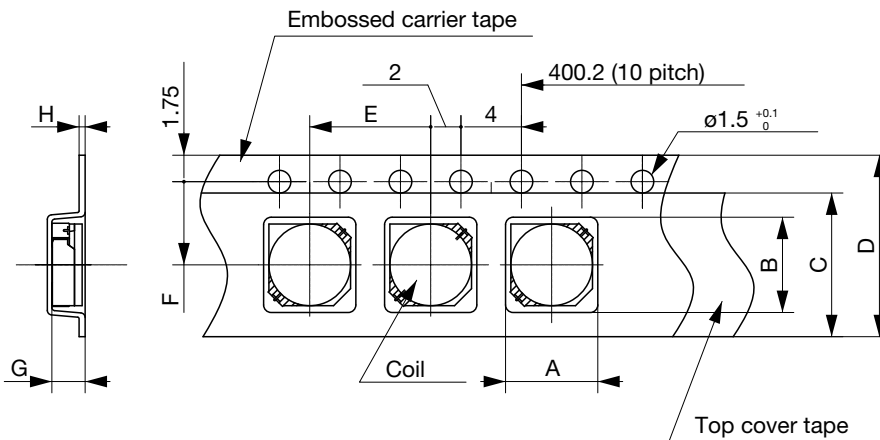

• Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
 • The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.

SMD Products Taping Specification

	Type	Tape Dimensions (mm)								Reel Dimensions (mm)			Q'ty Pcs/Reel
		A	B	C	D	E	F	G	H	I	J	K	
Power Inductors	C3-P1.0R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.3)	0.3±0.05	ø330±2	17.5±1	13.5±1	5,000
	C3-P1.2R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	5,000
	C3-P1.2RA	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	5,000
	C3-P1.5R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	4,000
	C4-P1.5R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	4,000
	C4-P1.8R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(2.1)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Z1.2R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Z1.5R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Z1.8R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(2.1)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Y1.2R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.4)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Y1.5R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Y1.8R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(2.1)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C4-Y1.2R	(4.9)	(4.9)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C4-Y1.5R	(4.9)	(4.9)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C4-K1.8R	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C4-K1.8RA	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C4-K3L	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C4-K3LA	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-K1.8L	(6.1)	(6.1)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.3±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-K1.8LA	(6.1)	(6.1)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.3±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-K3LGA	(6.1)	(6.1)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C6-K1.8L	(7.2)	(7.2)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	2.2±0.2	0.3±0.1	ø330±2	21.5±1	17.5±1	1,000
	C6-K3LG	(7.2)	(7.2)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	3.4±0.2	0.3±0.1	ø330±2	21.5±1	17.5±1	1,000
	C6-K5LGA	(7.2)	(7.2)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	5.3±0.2	0.4±0.1	ø330±2	21.5±1	17.5±1	700
	C6-K5RA	(7.2)	(7.2)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	5.3±0.2	0.4±0.1	ø330±2	21.5±1	17.5±1	700
	C8-K4L	(8.7)	(8.7)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.1±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500
	C8-K5L	(8.7)	(8.7)	21±0.2	24±0.3	16±0.1	11.5±0.1	5.1±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500
	C8-K5LA	(8.7)	(8.7)	21±0.2	24±0.3	16±0.1	11.5±0.1	5.1±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500
	C10-K4L	(10.7)	(10.7)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.1±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500
	C10-K6L	(10.7)	(10.7)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.1±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500
C12-K4.5L	(13.6)	(13.6)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.5±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500	
C12-K7.5L	(12.4)	(12.4)	21±0.2	24±0.3	16±0.1	11.5±0.1	7.7±0.2	0.5±0.1	ø330±2	29.5±1	25.5±1	400	
C13-K4.5L	(12.1)	(12.1)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.5±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500	

SMD Products Taping Specification

	Type	Tape Dimensions (mm)								Reel Dimensions (mm)			Q'ty Pcs/Reel
		A	B	C	D	E	F	G	H	I	J	K	
Transformers	C5-T2.2R1	(5.5)	(5.5)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.4±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-T2.5R1	(5.5)	(5.5)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.7±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-T3R1	(5.5)	(5.5)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C6-T2.2R	(6.4)	(6.4)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C6-T3R	(6.4)	(6.4)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
Adjustable Coils (Including Coils for Corner sensor)	K5-N	(6)	(6.6)	13.5±0.2	16±0.3	8±0.1	7.5±0.1	6.5±0.2	0.5±0.1	ø330±2	21.5±1	17.5±1	1,000
	K5-R2	9±0.2	9±0.2	13.5±0.2	16±0.3	12±0.1	7.5±0.1	8.5±0.2	0.4±0.1	ø330±2	21.5±1	17.5±1	500
	K5-R3	(9.5)	(10)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	(7.8)	0.4±0.1	ø330±2	21.5±1	17.5±1	500
	M5-N	(6)	(6.6)	13.5±0.2	16±0.3	8±0.1	7.5±0.1	6.5±0.2	0.5±0.1	ø330±2	21.5±1	17.5±1	1,000
	K5-RS	(9.5)	(10)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	(7.8)	0.4±0.1	ø330±2	21.5±1	17.5±1	500
	K7-R	(11.4)	(11.1)	21±0.2	24±0.3	16±0.1	(11.5)	(7.6)	0.4±0.1	ø330±2	29.5±1	25.5±1	400