
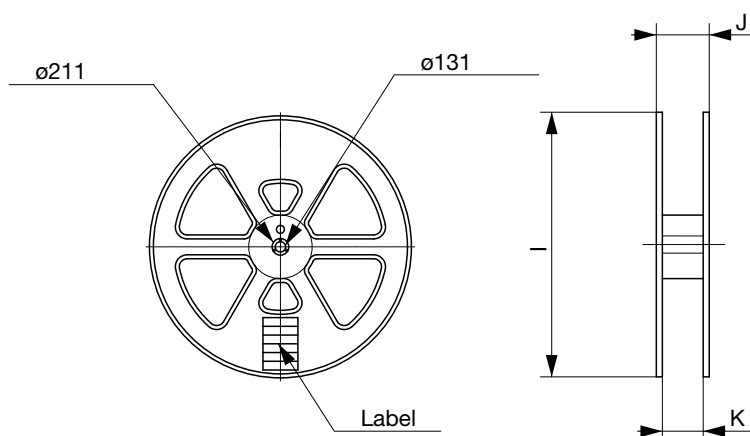
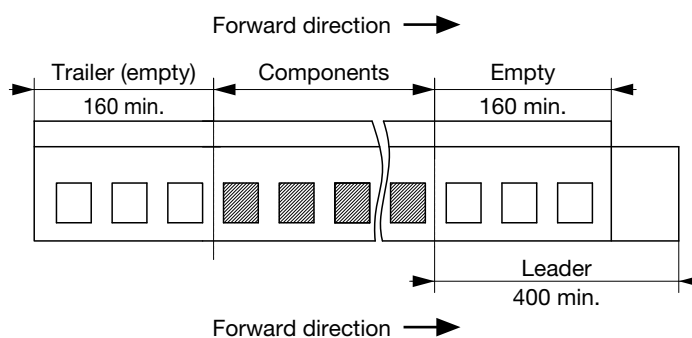


## SMD Products Taping Specification

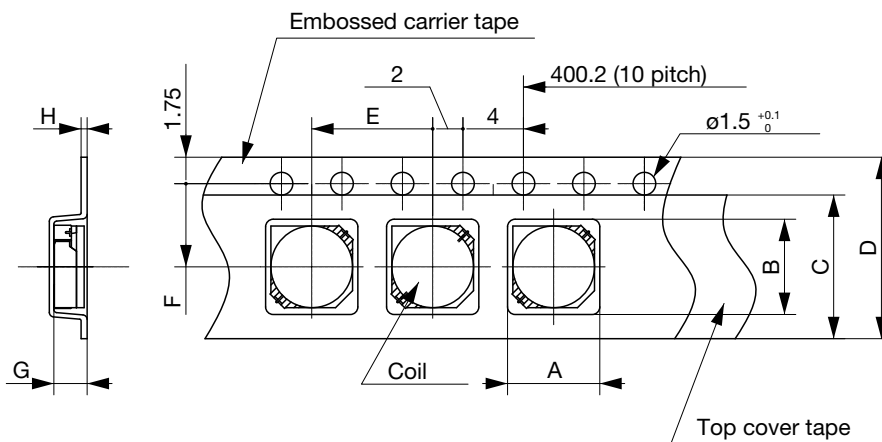

## SMD Products Taping Specification

	Type	Tape Dimensions (mm)								Reel Dimensions (mm)			Q'ty Pcs/Reel
		A	B	C	D	E	F	G	H	I	J	K	
Power Inductors	C3-P1.0R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.3)	0.3±0.05	ø330±2	17.5±1	13.5±1	5,000
	C3-P1.2R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	5,000
	C3-P1.2RA	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	5,000
	C3-P1.5R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	4,000
	C4-P1.5R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	4,000
	C4-P1.8R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(2.1)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Z1.2R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Z1.5R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Z1.8R	(3.3)	(3.3)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(2.1)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Y1.2R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.4)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Y1.5R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.7)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C3-Y1.8R	(4.2)	(4.2)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(2.1)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C4-Y1.2R	(4.9)	(4.9)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C4-Y1.5R	(4.9)	(4.9)	9.5±0.2	12±0.3	8.0±0.1	5.5±0.1	(1.5)	0.3±0.05	ø330±2	17.5±1	13.5±1	3,000
	C4-K1.8R	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C4-K1.8RA	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C4-K3L	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C4-K3LA	(5.3)	(5.3)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.3±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-K3LGA	(6.1)	(6.1)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C6-K3LG	(7.2)	(7.2)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	3.4±0.2	0.3±0.1	ø330±2	21.5±1	17.5±1	1,000
C6-K5LGA	(7.2)	(7.2)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	5.3±0.2	0.4±0.1	ø330±2	21.5±1	17.5±1	700	
C6-K5RA	(7.2)	(7.2)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	5.3±0.2	0.4±0.1	ø330±2	21.5±1	17.5±1	700	
C8-K4L	(8.7)	(8.7)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.1±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500	
C10-K6L	(10.7)	(10.7)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.1±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500	
C12-K4.5L	(13.6)	(13.6)	21±0.2	24±0.3	16±0.1	11.5±0.1	4.5±0.2	0.4±0.1	ø330±2	29.5±1	25.5±1	500	
C12-K7.5L	(12.4)	(12.4)	21±0.2	24±0.3	16±0.1	11.5±0.1	7.7±0.2	0.5±0.1	ø330±2	29.5±1	25.5±1	400	

## SMD Products Taping Specification

	Type	Tape Dimensions (mm)								Reel Dimensions (mm)			Q'ty Pcs/Reel
		A	B	C	D	E	F	G	H	I	J	K	
Transformers	C5-T2.2R1	(5.5)	(5.5)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.4±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-T2.5R1	(5.5)	(5.5)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.7±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C5-T3R1	(5.5)	(5.5)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C6-T2.2R	(6.4)	(6.4)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	2.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
	C6-T3R	(6.4)	(6.4)	9.5±0.2	12±0.3	8±0.1	5.5±0.1	3.2±0.2	0.4±0.1	ø330±2	17.5±1	13.5±1	2,000
Adjustable Coils (Including Coils for Corner sensor)	K5-N	(6)	(6.6)	13.5±0.2	16±0.3	8±0.1	7.5±0.1	6.5±0.2	0.5±0.1	ø330±2	21.5±1	17.5±1	1,000
	K5-R2	9±0.2	9±0.2	13.5±0.2	16±0.3	12±0.1	7.5±0.1	8.5±0.2	0.4±0.1	ø330±2	21.5±1	17.5±1	500
	K5-R3	(9.5)	(10)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	(7.8)	0.4±0.1	ø330±2	21.5±1	17.5±1	500
	M5-N	(6)	(6.6)	13.5±0.2	16±0.3	8±0.1	7.5±0.1	6.5±0.2	0.5±0.1	ø330±2	21.5±1	17.5±1	1,000
	K5-RS	(9.5)	(10)	13.5±0.2	16±0.3	12±0.1	7.5±0.1	(7.8)	0.4±0.1	ø330±2	21.5±1	17.5±1	500
	K7-R	(11.4)	(11.1)	21±0.2	24±0.3	16±0.1	(11.5)	(7.6)	0.4±0.1	ø330±2	29.5±1	25.5±1	400