


Optical Digital Connectors

CSK-M94

FEATURES

1. Electrical plug fitting to plug ensures excellent vibration resistance with easy handling.
2. A lock device ensures excellent vibration resistance.

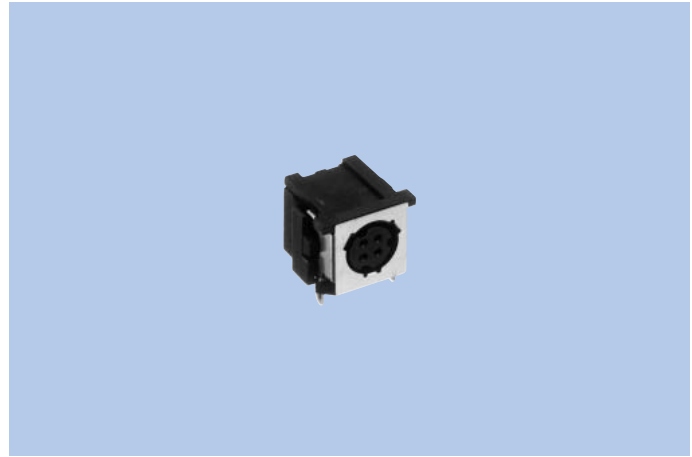

HOW TO ORDER

1. CSK-M94

M94 - -
1 2 3

- 1 Series No. (M94)
- 2 Running No. assigned by us
- 3 Supplementary No.

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS


Transmission Speed	DC~6Mb/s (NRZ)
Output Interface	TTL direct-drive
Input Interface	LED direct-drive
Pulse Width Distortion	±30ns
Jitter Quantity	15ns max.

MATERIAL & FINISH


Component Parts		Material	Finish
CSK-M94	Housing	PBT resin	—
	Cover	PBT resin	—
	Contact	Copper Alloy	Gold plating
	Shielded Case	Copper Alloy	Gold flash plating Tin reflow plating

DIMENSIONS

CSK-M94 (R)

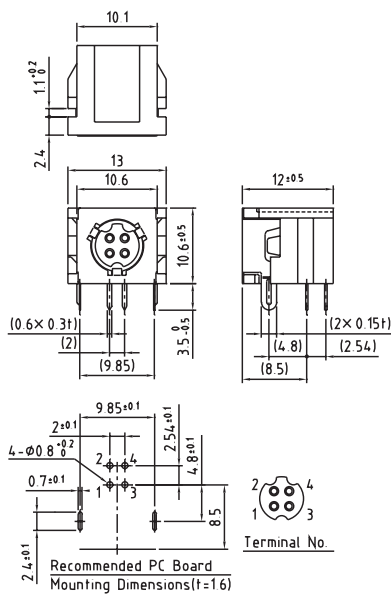

CSK-M94 (T)

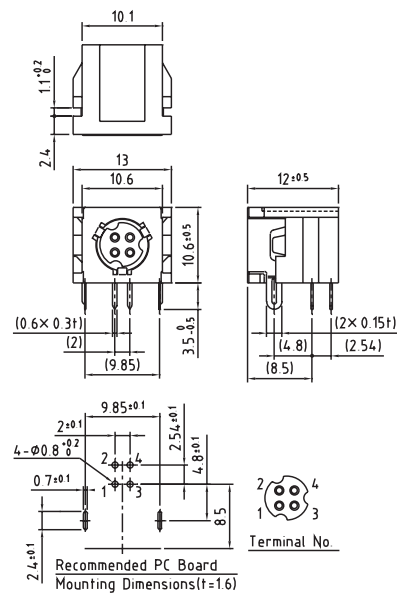

Unit : mm