


Ultra Mini Connectors CAM-H12

FEATURES

1. Ultra-small and thin size realized for 10 pins.
2. It is the most suitable for the connection with PC peripheral equipment with PCs, PDAs, mobile phones and so on.
3. Utilizes a sequential function that slides power supply and signal contact connection timing.
4. Couple/decouple reliability ensured for 3,000 times.
5. Weight : 0.3g

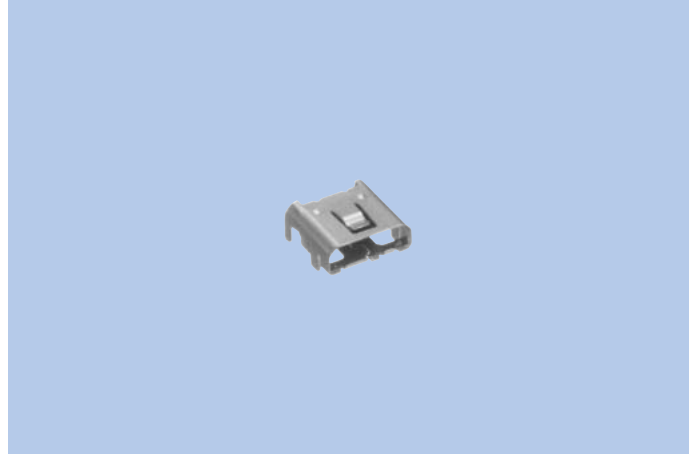

HOW TO ORDER

H12 - 010 - 05 0 - A G G A A
1 2 3 4 5 6 7 8 9

- 1 Series No. (H12)
- 2 No. of contacts (010 : 10pins)
- 3 Housing material (05 : 46Nylon resin)
- 4 UL grade (0 : 94V-0)
- 5 Contact plating (A : Gold)
- 6 Contact plating thickness (G : 0.3μm)
- 7 Contact tail style (G : Angle SMT)
- 8 Coupling side accessories (A : None)
- 9 Board side accessories (A : None)

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Rated Voltage	AC 5V (rms)
Rated Current	0.5A
Withstanding Voltage	100V AC (rms) 1minute
Insulation Resistance	100MΩ min. (at 500V AC)
Contact Resistance	50mΩ max.

MECHANICAL CHARACTERISTICS

Life (Matching Cycle)	3,000 times
Total Insertion Force	35N (3.57kgf) max.
Total Withdrawal Force	1N (0.1kgf) min.


• Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
 • The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.

MATERIAL & FINISH

Component parts		Material	Finish
CAM-H12	Housing	Thermo plastic	Black
	Contact	Copper alloy	Gold plating
	Shield Case	Copper alloy	Gold flash plating

DIMENSIONS

CAM-H12

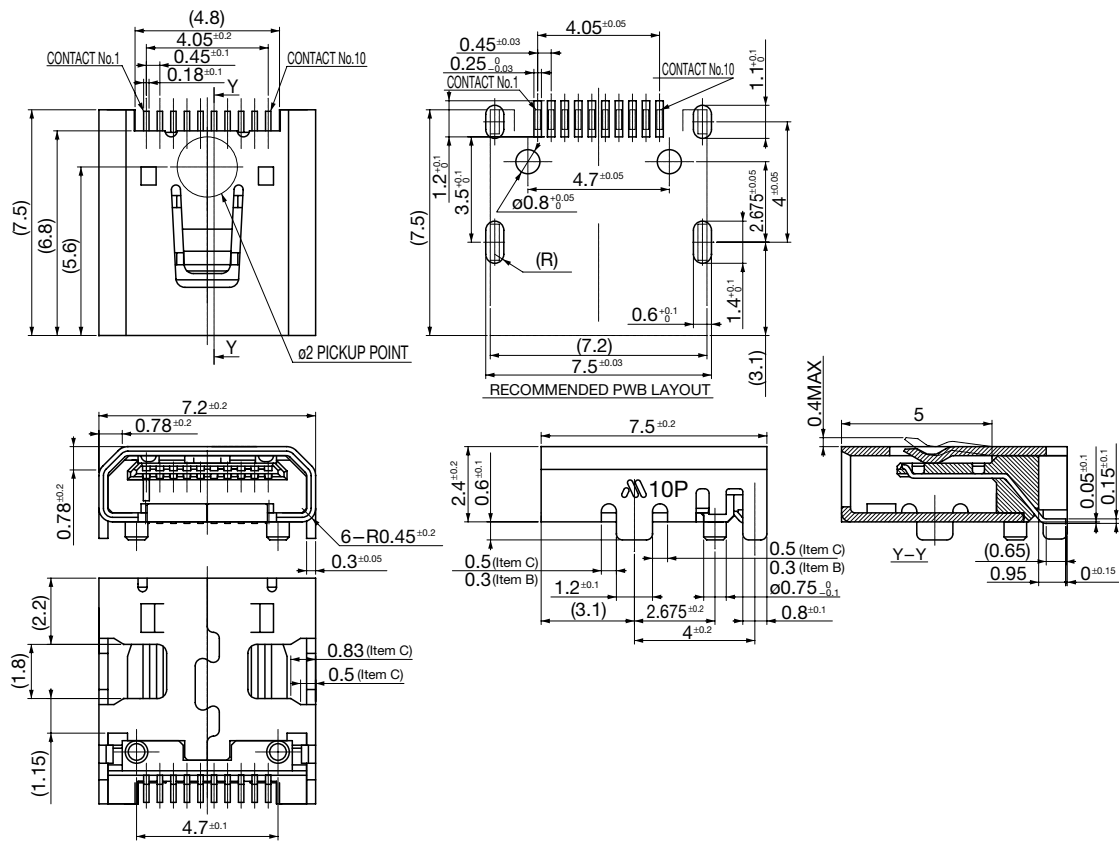

Unit : mm