

# Geared Motors

## M15N-3G

DC Mini-Motors

### APPLICATIONS

Facial Care Equipment





### SPECIFICATIONS


Items	Reduction Ratio	
	1/47	1/118
Rated Voltage	6.0V	4.5V
Voltage Range	4.5~6.0V	3.0~4.5V
Rated Load	20mN·m	23mN·m
No Load Speed	450rpm	109rpm
No Load Current	300mA	180mA
Starting Torque	90mN·m or more	140mN·m or more
Rotation	CW/CCW	

\*Characteristics can be customized.

### CHARACTERISTICS

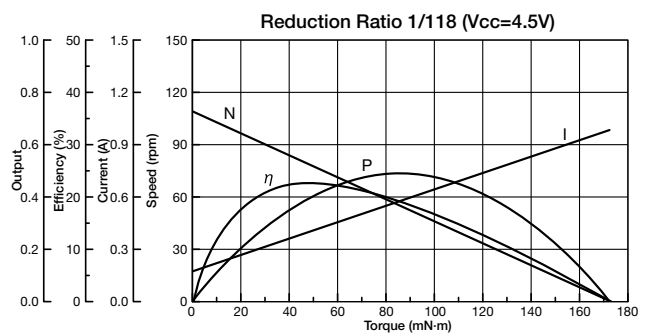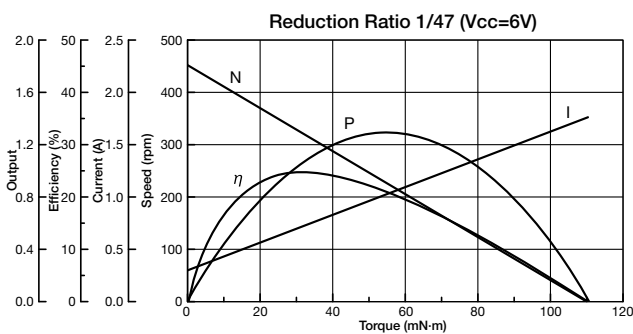

### DIMENSIONS

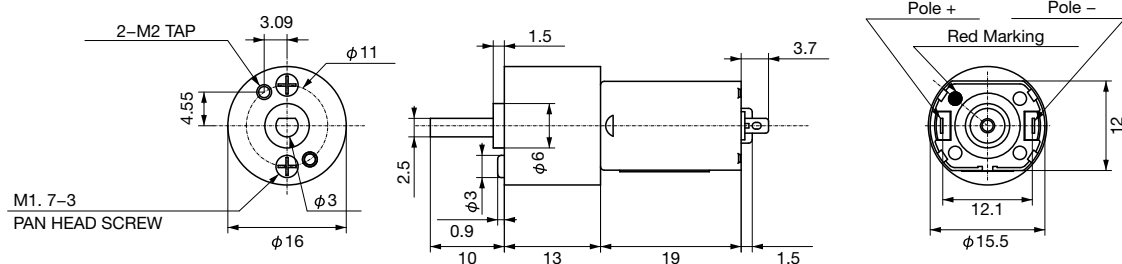

• Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.  
 • The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.