

Card Type Infrared Remote Control Unit REA-39 (STD-39)

OUTLINE

It has the multi function switch and very excellent operativeness is achieved.
 It has the shape etc. of the body that fits the switch and the hand functionally arranged. As a result, the device that doesn't decrease operativeness has been increased.
 Installation is possible with a slide switch.
 An excellent operation feeling that uses the rubber switch is succeeded to as it is, and it corresponds to a wider usage and the function.
 This model also has the same wide range of use, from video cameras and car audio to portable AV equipment.
 It realizes a high degree of operation performance.



FEATURES

1. Key settings (maximum 40 keys) and nameplate design can be custom ordered.
2. Can be used with video cameras, car audio, portable AV equipment and more.
3. Manufacturing location: Malaysia.


SPECIFICATIONS

Power Supply	3V DC (CR2025 lithium battery 1piece.)
Transmitting Signal Modulation Frequency	37.9kHz
Transmitting Distance	5m (min.)
No. of Keys	40keys (max.)
Operating Temperature Range	-20~+60°C
Transmitting IC Individual orders	Individual orders

APPEARANCE AND OTHER SPECIFICATIONS

Item	Standard Specifications	Optional Specifications
Upper and Lower Cases	Molded base color (black)	_____
Key Top	Monochrome, rubber-coated resin.	Plural-color is available at option.
Window (LED part)	None	_____
Nameplate	Polycarbonate (Design is individual specification.)	_____
Back Label	None	Back label is available.
Infrared LED	1 piece	_____
Packing	Mitsumi standard packing	A previous arrangement specially.

DIMENSIONS

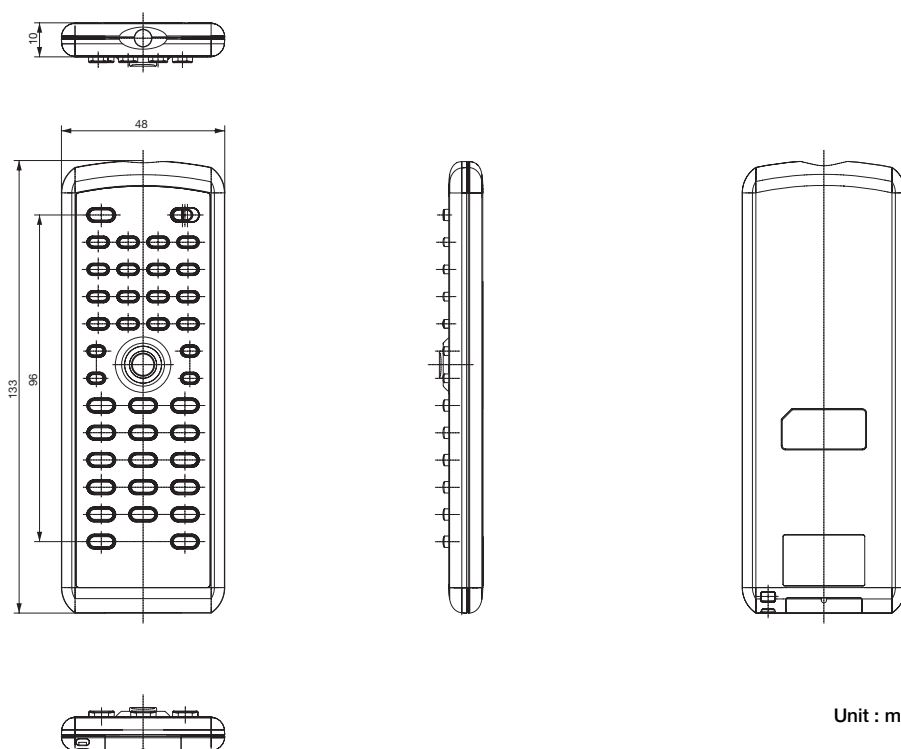

Unit : mm