


Internal Power Supply For Liquid Crystal Television

SRV2091 Series

Adaptors, Chargers/Switching Power Supplies

FEATURES


1. Stable and efficient high current/power supply.
2. Two converter system with power factor-improved PFC and resonance circuit and pseudo-resonance circuit.
3. Safety design with control and protection circuits in each circuit.
4. Supporting 26~37 inch class.
5. Worldwide support.

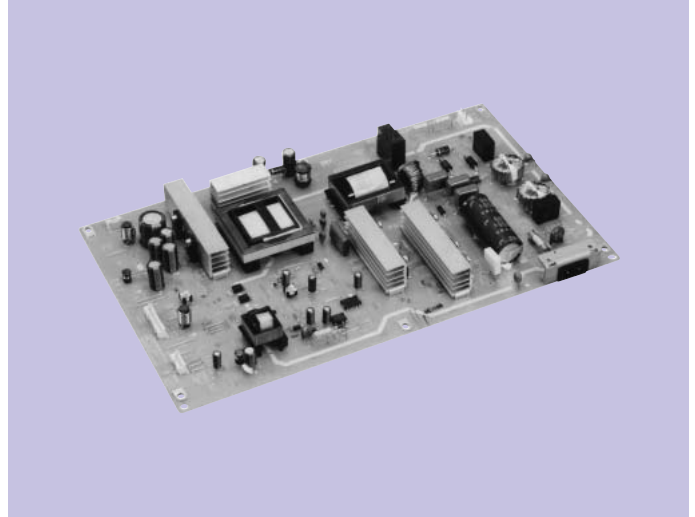

USES

1. Liquid crystal television.


BLOCK DIAGRAM

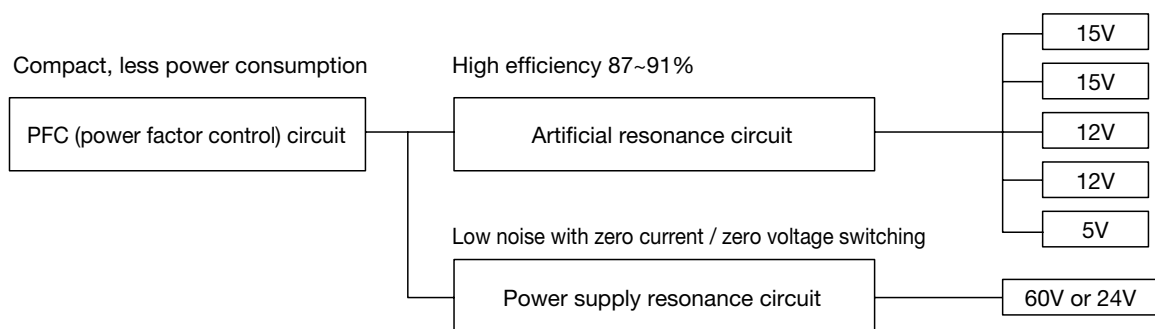

SPECIFICATIONS

Item	Specifications	
Models	SRV2091WW	
Destination	Worldwide support	
Input Voltage	AC 100~240V	
Output Voltage	60V or 24V	typ 2.4A or 6A
	5V	typ 0.15A
	12V	typ 0.1A
	12V	typ 2.2A
	15V	typ 0.5A
15V	typ 2.1A	
Stand by power consumption	1W less than	
Power Consumption	245W	
Environmental Condition	Operating temperature	-5~40°C
	Storage temperature	-30~70°C

DIMENSIONS

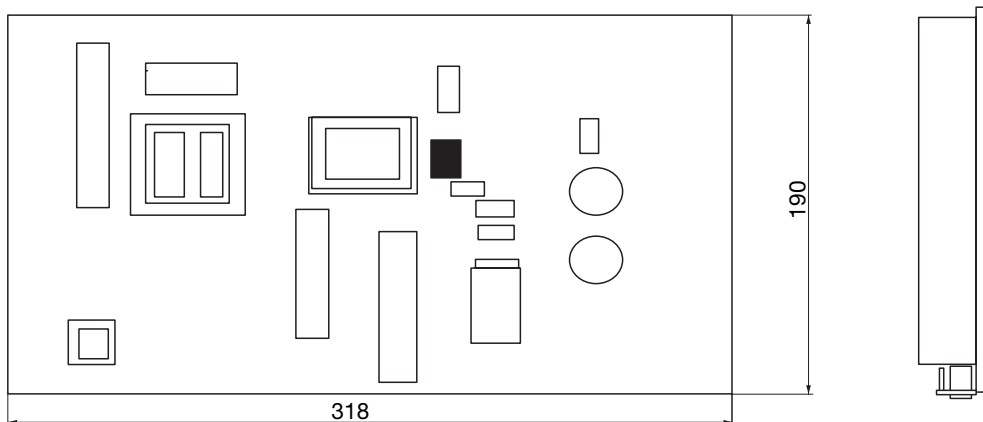

Unit : mm

* Equipped with parts MAX height : 25mm