


With Button Tactile Switches SOE Series

FEATURES


1. Minimized mounting area.
2. Excellent dust proof and flux resistance.
3. Using the stainless steel click spring with long life and sharp feeling.
4. Suitable for mounting a narrow key pitch.
5. Suitable for SMT reflow soldering.

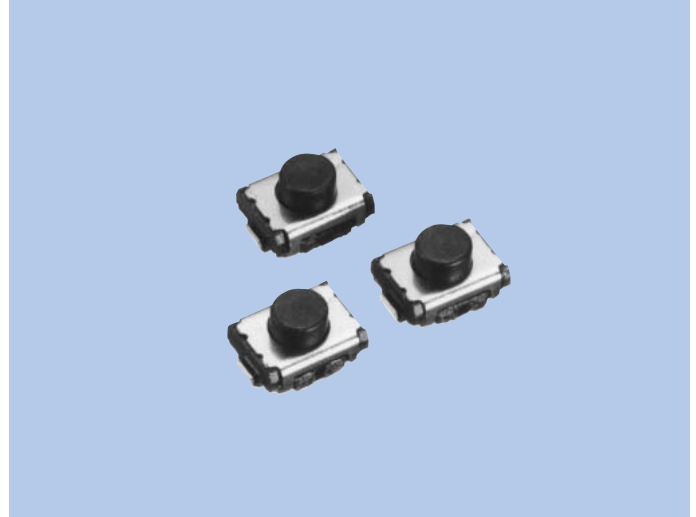

APPLICATIONS

1. Suitable for the narrow key pitch.

MODEL NAME CODE

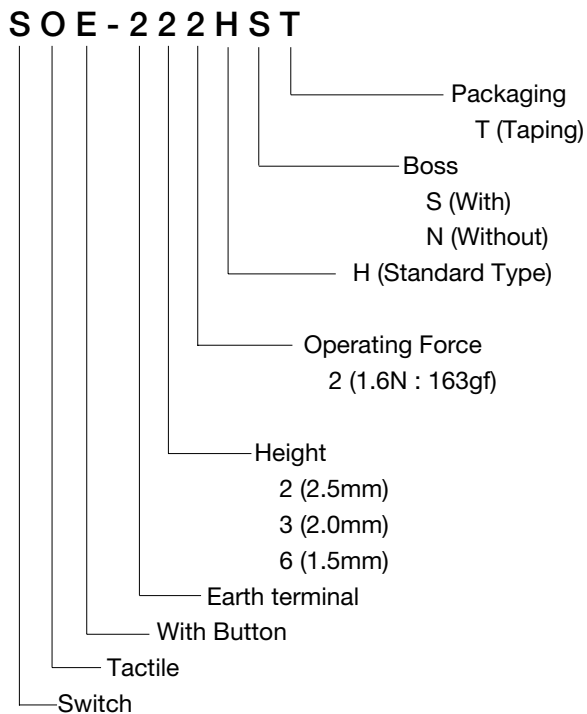


SPECIFICATIONS

Electrical Characteristics	Rating	50mA, 12V DC
	Contact Resistance	100mΩ or less
	Insulation Resistance	100MΩ or more
	Withstand Voltage	1 minute at 250V
Mechanical Characteristics	Operating Force	1.6N (163gf)
	Life	100,000cycles


TYPE

Model Name Code	Order Number	Operating Force	Boss	Mounting Height (h)	Pcs
SOE-222HST	R66 6112	1.6N(163gf)	With	2.5mm	4,000
SOE-222HNT	R66 6113	1.6N(163gf)	Without	2.5mm	4,000
SOE-232HST	R66 6114	1.6N(163gf)	With	2.0mm	4,000
SOE-232HNT	R66 6115	1.6N(163gf)	Without	2.0mm	4,000
SOE-262HST	R66 6159	1.6N(163gf)	With	1.5mm	4,000
SOE-262HNT	R66 6160	1.6N(163gf)	Without	1.5mm	4,000

DIMENSIONS

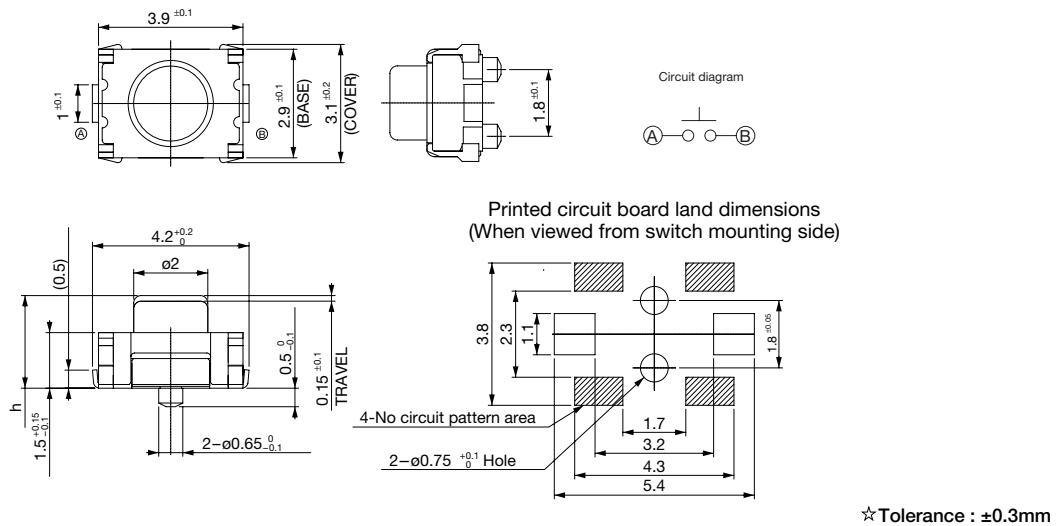

Reel Dimensions

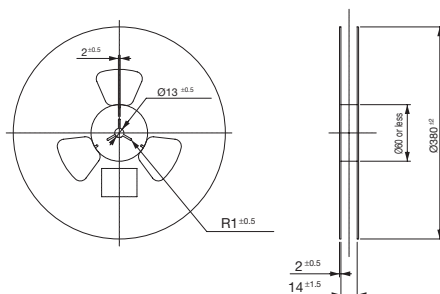

Plastic Tape Dimensions

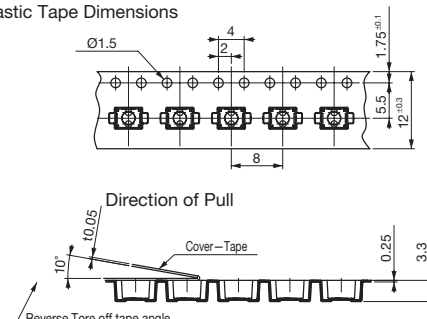


Fig-3 TOLERANCE ±0.1

*One reel accommodates 4,000 pieces (Ø380).

Unit : mm