


Side Click Type Tactile Switches SOH Series

FEATURES


1. Minimized mounting area.
2. Excellent dust proof and flux resistance.
3. Using the stainless steel click spring with long life and sharp feeling.
4. Suitable for controllers with side click in small equipment.
5. Suitable for SMT reflow soldering.

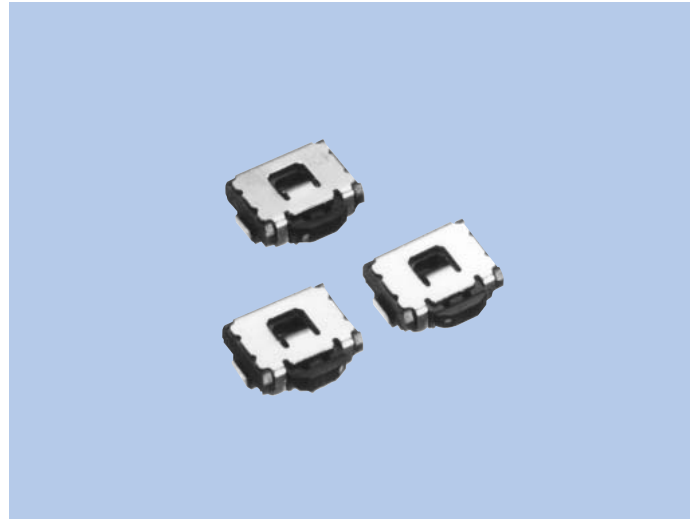

APPLICATIONS

1. For mobile phones and small digital devices.

MODEL NAME CODE

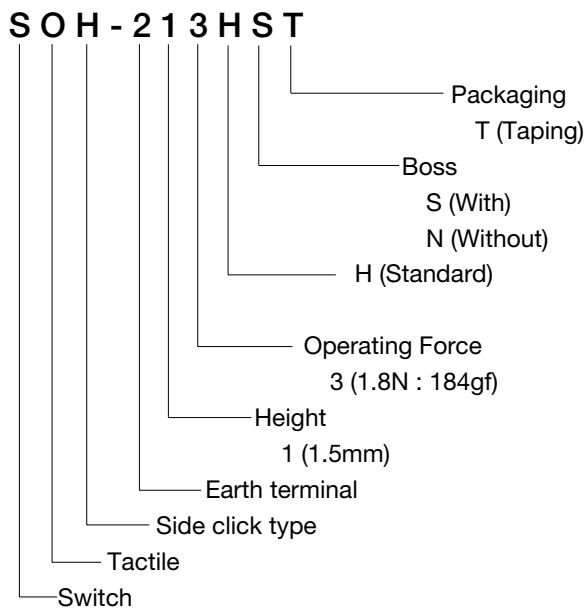



SPECIFICATIONS

Electrical Characteristics	Rating	50mA, 12V DC
	Contact Resistance	100mΩ or less
	Insulation Resistance	100MΩ or more
	Withstand Voltage	1 minute at 250V
Mechanical Characteristics	Operating Force	1.8N (184gf)
	Life	100,000cycles


TYPE

Model Name Code	Order Number	Operating Force	Boss	Pcs
SOH-213HST	R66 6072	1.8N(183gf)	With	5,000
SOH-213HNT	R66 6073	1.8N(183gf)	Without	5,000


DIMENSIONS




Circuit diagram



Recommendation Metarumasuk Thickness : 200μm




Reference Printed wiring board land dimensions
(When viewed from switch mounting side)

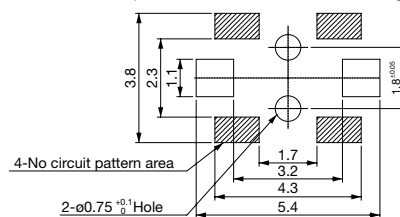

☆Tolerance: ± 0.3mm

Reel Dimensions

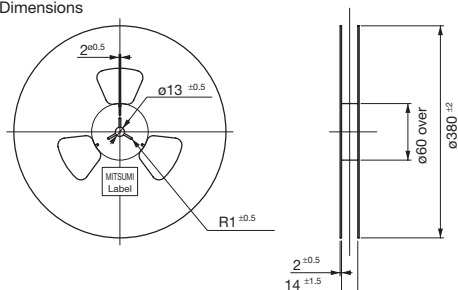

Plastic Tape Dimensions

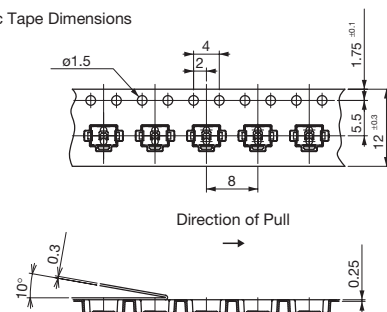


Fig-3 TOLERANCE ±0.1

*One reel accommodates 5,000 pieces (Ø380).

Unit : mm