

# 200mA Ultra-Small Regulator IC Monolithic IC MM3436

## Outline

This IC is a high speed response 200mA regulator IC with low quiescent current and high ripple rejection. No load input current is 20 $\mu$ A typ. And ripple rejection is 75dB typ. Dropout voltage is low at 80mV typ., and the output current is 200mA. Therefore the IC applies to most mobile equipment. Significant space efficiency realized through its ultra-small package size of 1.0 mm  $\times$  1.0 mm.

## Features

|                            |                                      |
|----------------------------|--------------------------------------|
| 1. Output current          | 200mA                                |
| 2. No load input current   | 20 $\mu$ A typ.                      |
| 3. Input current (OFF)     | 0.1 $\mu$ A max.                     |
| 4. Output voltage range    | 0.8-5.0V                             |
| 5. Output voltage accuracy | $\pm$ 1% ( $\pm$ 20mV, $V_o < 2V$ )  |
| 6. Dropout voltage         | 80mV typ. ( $I_o = 100mA$ )          |
| 7. Line regulation         | $\pm$ 0.2%/V max.                    |
| 8. Load regulation         | 40mV max. ( $I_o = 0.1 \sim 100mA$ ) |
| 9. Ripple rejection        | 75dB typ. ( $f = 1kHz$ )             |
| 10. Output Capacitor       | 1 $\mu$ F                            |

## Package

PLP-4A

## Applications

1. Cellular phones
2. Digital still cameras
3. Mobile equipments

Model Name

M M 3 4 3 6     E


① ② ③ ④

| ①             |                                            | ②                   |                                                 |
|---------------|--------------------------------------------|---------------------|-------------------------------------------------|
| Function Type |                                            | Voltage Output RANK |                                                 |
| A             | CE=H-Active,<br>with Discharge Function    | 08                  | ①="A, B, C" V <sub>o</sub> (typ.)=0.8V          |
| Z             |                                            |                     | ①="Z, Y, W" V <sub>o</sub> (typ.)=0.85V         |
| B             | CE=L-Active,<br>with Discharge Function    | ゝ                   | ①="A, B, C" V <sub>o</sub> (typ.) is 0.1V steps |
| Y             |                                            |                     | ①="Z, Y, W" V <sub>o</sub> (typ.) =0.05V steps  |
| C             | CE=H-Active,<br>without Discharge Function | 50                  | ①="A, B, C" V <sub>o</sub> (typ.) =5.0V         |
| W             |                                            |                     |                                                 |


| ③       |                    | ④                      |                      |
|---------|--------------------|------------------------|----------------------|
| Package |                    | Packing Specifications |                      |
| R       | PLP-4A (1010 size) | R                      | R HOUSING (Standard) |
|         |                    | L                      | L HOUSING            |
|         |                    |                        |                      |
|         |                    |                        |                      |
|         |                    |                        |                      |
|         |                    |                        |                      |

• Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.  
• The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.

## Block Diagram

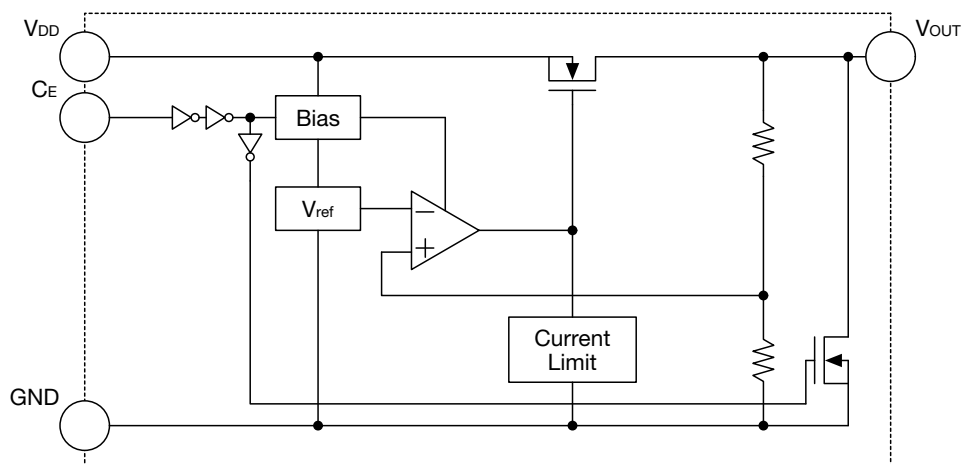

## Pin Assignment



PLP-4A  
(TOP VIEW)

Heat Spreader Bottom  
Note1

|   |                  |
|---|------------------|
| 1 | V <sub>OUT</sub> |
| 2 | GND              |
| 3 | CE               |
| 4 | V <sub>DD</sub>  |

## Pin Description

| Pin No.                                                          | Pin name         | Functions                                                                                                       | Internal equivalent circuit       |        |        |   |     |   |    |
|------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------|--------|--------|---|-----|---|----|
| 1                                                                | V <sub>OUT</sub> | Output pin                                                                                                      | Please refer to<br>BLOCK DIAGRAM. |        |        |   |     |   |    |
| 2                                                                | GND              | GND pin                                                                                                         |                                   |        |        |   |     |   |    |
| 3                                                                | CE               | ON/OFF-Control pin                                                                                              |                                   |        |        |   |     |   |    |
|                                                                  |                  | <table><tr><td>CE</td><td>Output</td></tr><tr><td>L</td><td>OFF</td></tr><tr><td>H</td><td>ON</td></tr></table> |                                   | CE     | Output | L | OFF | H | ON |
|                                                                  |                  | CE                                                                                                              |                                   | Output |        |   |     |   |    |
|                                                                  |                  | L                                                                                                               | OFF                               |        |        |   |     |   |    |
| H                                                                | ON               |                                                                                                                 |                                   |        |        |   |     |   |    |
| Connect CE pin with V <sub>DD</sub> pin,<br>when it is not used. |                  |                                                                                                                 |                                   |        |        |   |     |   |    |
| 4                                                                | V <sub>DD</sub>  | Voltage-Supply pin                                                                                              |                                   |        |        |   |     |   |    |

Note1 : Heat Spreader Bottom with GND.

## Absolute Maximum Ratings (Except where noted otherwise Ta=25°C)

| Item                | Symbol            | Ratings                   | Units |
|---------------------|-------------------|---------------------------|-------|
| Storage Temperature | T <sub>stg</sub>  | -55~+150                  | °C    |
| Supply Voltage      | V <sub>DD</sub>   | -0.3~+7.0                 | V     |
| CE Input Voltage    | V <sub>CE</sub>   | -0.3~V <sub>DD</sub> +0.3 | V     |
| Output Voltage      | V <sub>OUT</sub>  | -0.3~V <sub>DD</sub> +0.3 | V     |
| Output Current      | I <sub>omax</sub> | 400                       | mA    |
| Power Dissipation   | P <sub>d</sub>    | 400 (Note2)               | mW    |

Note2 : With the double sided PC Board of glass epoxy. (40 × 40 × 1.6mm copper plane 90%)

## Recommended Operating Conditions (Except where noted otherwise Ta=25°C)

| Item                          | Symbol           | Ratings | Units |
|-------------------------------|------------------|---------|-------|
| Operating Ambient Temperature | T <sub>jop</sub> | -40~+85 | °C    |
| Operating Voltage             | V <sub>op</sub>  | 1.6~6.5 | V     |
| Output Current                | I <sub>o</sub>   | 0~200   | mA    |

## Electrical Characteristics 1 (Except where noted otherwise V<sub>DD</sub>=V<sub>out</sub>(typ.)+1V, V<sub>CE</sub>=V<sub>DD</sub>, Ta=25°C)

| Item                                             | Symbol                | Measurement conditions                                                                            | Min.  | Typ. | Max.  | Units  |
|--------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------------------|-------|------|-------|--------|
| Input Current(OFF)                               | I <sub>DDoff</sub>    | V <sub>CE</sub> =0V                                                                               |       | 0.01 | 0.1   | μA     |
| No-Load Input Current                            | I <sub>DD</sub>       | I <sub>OUT</sub> =0mA                                                                             |       | 20   | 50    | μA     |
| Output Voltage                                   | V <sub>OUT</sub>      | I <sub>OUT</sub> =10mA (V <sub>OUT</sub> ≥2.0V)                                                   | ×0.99 |      | ×1.01 | V      |
|                                                  |                       | I <sub>OUT</sub> =10mA (V <sub>OUT</sub> ≤1.95V)                                                  | -0.02 |      | 0.02  | V      |
| Line Regulation                                  | V <sub>LINE</sub>     | V <sub>O</sub> (typ.)+0.5≤V <sub>DD</sub> ≤6.5V<br>V <sub>OUT</sub> ≥1.1V, I <sub>OUT</sub> =10mA |       | 0.01 | 0.2   | %/V    |
|                                                  |                       | 1.6V≤V <sub>DD</sub> ≤6.5V<br>V <sub>OUT</sub> ≤1.05V, I <sub>OUT</sub> =10mA                     |       |      |       |        |
| Load Regulation                                  | V <sub>LOAD</sub>     | 0.1mA≤I <sub>OUT</sub> ≤100mA                                                                     |       | 10   | 40    | mV     |
| Dropout Voltage                                  | V <sub>io</sub>       | Please refer to another page                                                                      |       |      |       | V      |
| Ripple Rejection (Note3)                         | RR                    | f=1kHz, V <sub>ripple</sub> =0.5V, I <sub>OUT</sub> =30mA<br>V <sub>OUT</sub> ≥0.85V              |       | 75   |       | dB     |
|                                                  |                       | f=1kHz, V <sub>ripple</sub> =0.5V, I <sub>OUT</sub> =30mA<br>V <sub>OUT</sub> =0.8V               |       |      |       |        |
| V <sub>OUT</sub> Temperature Coefficient (Note3) | ΔV <sub>OUT</sub> /ΔT | I <sub>OUT</sub> =30mA, -40≤T <sub>op</sub> ≤+85°C                                                |       | ±50  |       | ppm/°C |
| Output Current Limit                             | I <sub>lim</sub>      |                                                                                                   | 200   | 250  |       | mA     |
| Output Short-Circuit Current                     | I <sub>short</sub>    | V <sub>OUT</sub> =0V                                                                              |       | 30   |       | mA     |
| CE High Threshold Voltage                        | V <sub>CEH</sub>      |                                                                                                   | 1.2   |      | 6.0   | V      |
| CE Low Threshold Voltage                         | V <sub>CEL</sub>      |                                                                                                   |       |      | 0.3   | V      |
| CE High Threshold Current                        | I <sub>CEH</sub>      |                                                                                                   | -0.1  |      | 0.1   | μA     |
| CE Low Threshold Current                         | I <sub>CEL</sub>      |                                                                                                   | -0.1  |      | 0.1   | μA     |
| CL Discharge Resistance                          | R <sub>disc</sub>     |                                                                                                   |       | 780  |       | Ω      |

Note3 : The parameter is guaranteed by design.


**Electrical Characteristics 2** (Except where noted otherwise  $V_{DD}=V_{OUT}(typ.)+1V$ ,  $V_{CE}=V_{DD}$ ,  $T_a=25^{\circ}C$ )

| Model No. | Item                   |       |       |       |                                                  |      |      |      |
|-----------|------------------------|-------|-------|-------|--------------------------------------------------|------|------|------|
|           | Output Voltage         |       |       |       | Dropout Voltage                                  |      |      |      |
|           | VOUT (V)               |       |       |       | Vio (mV)                                         |      |      |      |
|           | Measurement Conditions | Min.  | Typ.  | Max.  | Measurement Conditions                           | Min. | Typ. | Max. |
| MM3436A08 | Iout=10mA              | 0.780 | 0.800 | 0.820 | IOUT=100mA<br>Vout≤1.5V<br>(Note4)               |      | 500  | 850  |
| MM3436Z08 |                        | 0.830 | 0.850 | 0.870 |                                                  |      |      |      |
| MM3436A09 |                        | 0.880 | 0.900 | 0.920 |                                                  |      | 410  | 750  |
| MM3436Z09 |                        | 0.930 | 0.950 | 0.970 |                                                  |      |      |      |
| MM3436A10 |                        | 0.980 | 1.000 | 1.020 |                                                  |      | 330  | 650  |
| MM3436Z10 |                        | 1.030 | 1.050 | 1.070 |                                                  |      |      |      |
| MM3436A11 |                        | 1.080 | 1.100 | 1.120 |                                                  |      |      |      |
| MM3436Z11 |                        | 1.130 | 1.150 | 1.170 |                                                  |      |      |      |
| MM3436A12 |                        | 1.180 | 1.200 | 1.220 |                                                  |      | 230  | 380  |
| MM3436Z12 |                        | 1.230 | 1.250 | 1.270 |                                                  |      |      |      |
| MM3436A13 |                        | 1.280 | 1.300 | 1.320 |                                                  |      |      |      |
| MM3436Z13 |                        | 1.330 | 1.350 | 1.370 |                                                  |      |      |      |
| MM3436A14 |                        | 1.380 | 1.400 | 1.420 |                                                  |      | 200  | 360  |
| MM3436Z14 |                        | 1.430 | 1.450 | 1.470 |                                                  |      |      |      |
| MM3436A15 |                        | 1.480 | 1.500 | 1.520 | IOUT=100mA<br>Vout≥1.5V<br>VDD=VOUT (typ.) -0.2V |      | 180  | 290  |
| MM3436Z15 |                        | 1.530 | 1.550 | 1.570 |                                                  |      |      |      |
| MM3436A16 |                        | 1.580 | 1.600 | 1.620 |                                                  |      | 160  | 250  |
| MM3436Z16 |                        | 1.630 | 1.650 | 1.670 |                                                  |      |      |      |
| MM3436A17 |                        | 1.680 | 1.700 | 1.720 |                                                  |      |      |      |
| MM3436Z17 |                        | 1.730 | 1.750 | 1.770 |                                                  |      |      |      |
| MM3436A18 |                        | 1.780 | 1.800 | 1.820 |                                                  |      | 125  | 210  |
| MM3436Z18 |                        | 1.830 | 1.850 | 1.870 |                                                  |      |      |      |
| MM3436A19 |                        | 1.880 | 1.900 | 1.920 |                                                  |      |      |      |
| MM3436Z19 |                        | 1.930 | 1.950 | 1.970 |                                                  |      |      |      |
| MM3436A20 |                        | 1.980 | 2.000 | 2.020 |                                                  |      |      |      |
| MM3436Z20 |                        | 2.030 | 2.050 | 2.071 |                                                  |      |      |      |
| MM3436A21 |                        | 2.079 | 2.100 | 2.121 |                                                  |      | 115  | 195  |
| MM3436Z21 |                        | 2.129 | 2.150 | 2.172 |                                                  |      |      |      |
| MM3436A22 |                        | 2.178 | 2.200 | 2.222 |                                                  |      |      |      |
| MM3436Z22 |                        | 2.228 | 2.250 | 2.273 |                                                  |      |      |      |
| MM3436A23 |                        | 2.277 | 2.300 | 2.323 |                                                  |      |      |      |
| MM3436Z23 |                        | 2.327 | 2.350 | 2.374 |                                                  |      |      |      |
| MM3436A24 |                        | 2.376 | 2.400 | 2.424 |                                                  |      |      |      |
| MM3436Z24 |                        | 2.426 | 2.450 | 2.475 |                                                  |      |      |      |
| MM3436A25 |                        | 2.475 | 2.500 | 2.525 |                                                  |      |      |      |
| MM3436Z25 |                        | 2.525 | 2.550 | 2.576 |                                                  |      |      |      |
| MM3436A26 |                        | 2.574 | 2.600 | 2.626 |                                                  |      |      |      |
| MM3436Z26 |                        | 2.624 | 2.650 | 2.677 |                                                  |      |      |      |
| MM3436A27 |                        | 2.673 | 2.700 | 2.727 |                                                  |      | 95   | 170  |
| MM3436Z27 |                        | 2.723 | 2.750 | 2.778 |                                                  |      |      |      |
| MM3436A28 |                        | 2.772 | 2.800 | 2.828 |                                                  |      |      |      |
| MM3436Z28 |                        | 2.822 | 2.850 | 2.879 |                                                  |      |      |      |
| MM3436A29 |                        | 2.871 | 2.900 | 2.929 |                                                  |      |      |      |
| MM3436Z29 |                        | 2.921 | 2.950 | 2.980 |                                                  |      |      |      |


Note4 : Dropout voltage MAX value in the input and it is confirmed that there is no output abnormal voltage impression the load 100mA in the model less than Vout=1.5V.

| Model No. | Item                   |       |       |       |                                                  |      |      |      |
|-----------|------------------------|-------|-------|-------|--------------------------------------------------|------|------|------|
|           | Output Voltage         |       |       |       | Dropout Voltage                                  |      |      |      |
|           | VOUT (V)               |       |       |       | Vio (mV)                                         |      |      |      |
|           | Measurement Conditions | Min.  | Typ.  | Max.  | Measurement Conditions                           | Min. | Typ. | Max. |
| MM3436A30 | Iout=10mA              | 2.970 | 3.000 | 3.030 | IOUT=100mA<br>Vout≥1.5V<br>VDD=VOUT (typ.) -0.2V |      | 80   | 140  |
| MM3436Z30 |                        | 3.020 | 3.050 | 3.081 |                                                  |      |      |      |
| MM3436A31 |                        | 3.069 | 3.100 | 3.131 |                                                  |      |      |      |
| MM3436Z31 |                        | 3.119 | 3.150 | 3.182 |                                                  |      |      |      |
| MM3436A32 |                        | 3.168 | 3.200 | 3.232 |                                                  |      |      |      |
| MM3436Z32 |                        | 3.218 | 3.250 | 3.283 |                                                  |      |      |      |
| MM3436A33 |                        | 3.267 | 3.300 | 3.333 |                                                  |      |      |      |
| MM3436Z33 |                        | 3.317 | 3.350 | 3.384 |                                                  |      |      |      |
| MM3436A34 |                        | 3.366 | 3.400 | 3.434 |                                                  |      |      |      |
| MM3436Z34 |                        | 3.416 | 3.450 | 3.485 |                                                  |      |      |      |
| MM3436A35 |                        | 3.465 | 3.500 | 3.535 |                                                  |      |      |      |
| MM3436Z35 |                        | 3.515 | 3.550 | 3.586 |                                                  |      |      |      |
| MM3436A36 |                        | 3.564 | 3.600 | 3.636 |                                                  |      |      |      |
| MM3436Z36 |                        | 3.614 | 3.650 | 3.687 |                                                  |      |      |      |
| MM3436A37 |                        | 3.663 | 3.700 | 3.737 |                                                  |      |      |      |
| MM3436Z37 |                        | 3.713 | 3.750 | 3.788 |                                                  |      |      |      |
| MM3436A38 |                        | 3.762 | 3.800 | 3.838 |                                                  |      |      |      |
| MM3436Z38 |                        | 3.812 | 3.850 | 3.889 |                                                  |      |      |      |
| MM3436A39 |                        | 3.861 | 3.900 | 3.939 |                                                  |      |      |      |
| MM3436Z39 |                        | 3.911 | 3.950 | 3.990 |                                                  |      |      |      |
| MM3436A40 |                        | 3.960 | 4.000 | 4.040 |                                                  |      |      |      |
| MM3436Z40 |                        | 4.010 | 4.050 | 4.091 |                                                  |      |      |      |
| MM3436A41 |                        | 4.059 | 4.100 | 4.141 |                                                  |      |      |      |
| MM3436Z41 |                        | 4.109 | 4.150 | 4.192 |                                                  |      |      |      |
| MM3436A42 |                        | 4.158 | 4.200 | 4.242 |                                                  |      |      |      |
| MM3436Z42 |                        | 4.208 | 4.250 | 4.293 |                                                  |      |      |      |
| MM3436A43 |                        | 4.257 | 4.300 | 4.343 |                                                  |      |      |      |
| MM3436Z43 |                        | 4.307 | 4.350 | 4.394 |                                                  |      |      |      |
| MM3436A44 |                        | 4.356 | 4.400 | 4.444 |                                                  |      |      |      |
| MM3436Z44 |                        | 4.405 | 4.450 | 4.495 |                                                  |      |      |      |
| MM3436A45 |                        | 4.455 | 4.500 | 4.545 |                                                  |      |      |      |
| MM3436Z45 |                        | 4.504 | 4.550 | 4.595 |                                                  |      |      |      |
| MM3436A46 |                        | 4.554 | 4.600 | 4.646 |                                                  |      |      |      |
| MM3436Z46 |                        | 4.603 | 4.650 | 4.696 |                                                  |      |      |      |
| MM3436A47 |                        | 4.653 | 4.700 | 4.747 |                                                  |      |      |      |
| MM3436Z47 |                        | 4.702 | 4.750 | 4.797 |                                                  |      |      |      |
| MM3436A48 |                        | 4.752 | 4.800 | 4.848 |                                                  |      |      |      |
| MM3436Z48 |                        | 4.801 | 4.850 | 4.898 |                                                  |      |      |      |
| MM3436A49 |                        | 4.851 | 4.900 | 4.949 |                                                  |      |      |      |
| MM3436Z49 |                        | 4.900 | 4.950 | 4.999 |                                                  |      |      |      |
| MM3436A50 |                        | 4.950 | 5.000 | 5.050 |                                                  |      |      |      |

## Measuring Circuit

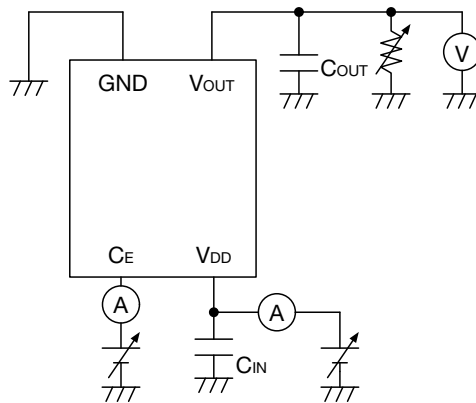

## Application Circuit

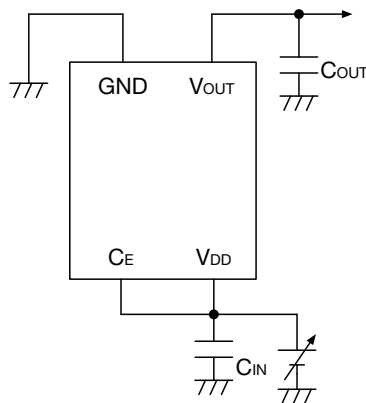

★ Temperature Characteristics : B Type

(reference example of external parts)


- Output capacitor                      Ceramic capacitor 1.0 $\mu$ F
- Input Capacitor                      Ceramic capacitor 1.0 $\mu$ F

· Note


1. The output capacitor is required between output and GND to prevent oscillation.
2. The ESR of capacitor must be defined in ESR stability area.  
It is possible to use a ceramic capacitor without ESR resistance for output.  
The ceramic capacitor must be used more than 1.0 $\mu$ F and B temperature characteristics.
3. The wire of Vcc and GND is required to print full ground plane for noise and stability.
4. The input capacitor must be connected a distance of less than 1cm from input pin.
5. In case the output voltage is above the input voltage, the overcurrent flow by internal parastic diode from output to input.

**Characteristics ( $V_o=0.8V$ )** 
 (Except where noted otherwise  $V_{DD}=V_{OUT}(typ.)+1V$ ,  $V_{CE}=V_{DD}$ ,  $T_a=25^{\circ}C$ )


**Output - Input voltage**

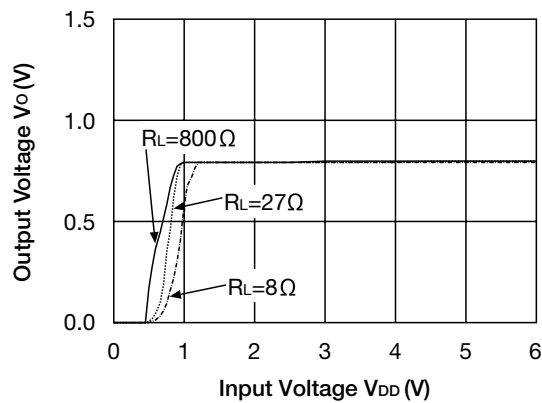


**Input current - Input voltage**

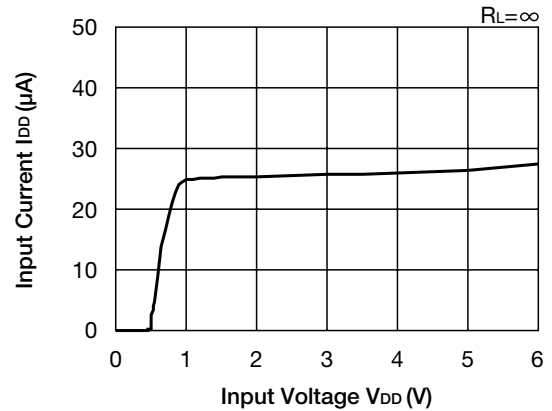


**Load regulation**

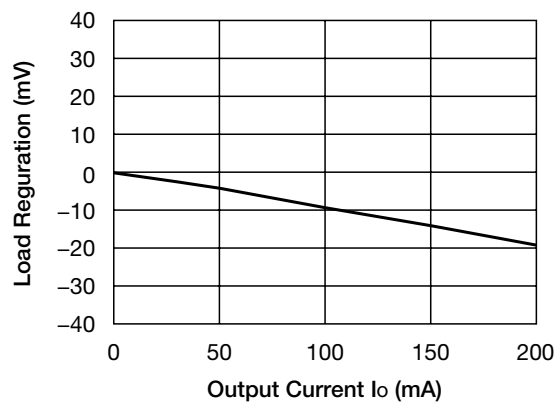


**Line regulation**

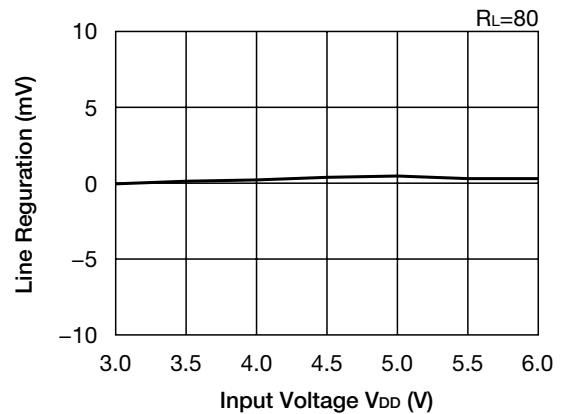


**$V_{OUT}$  temperature coefficient**

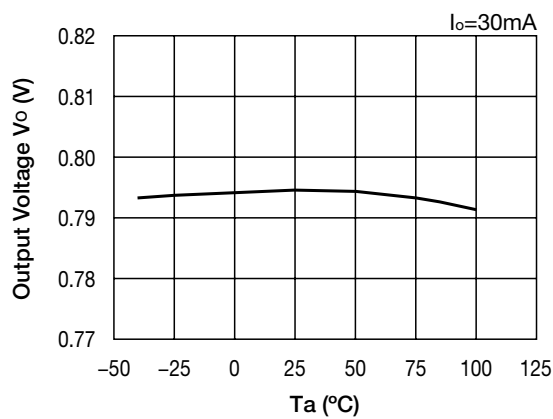


### Ripple Rejection

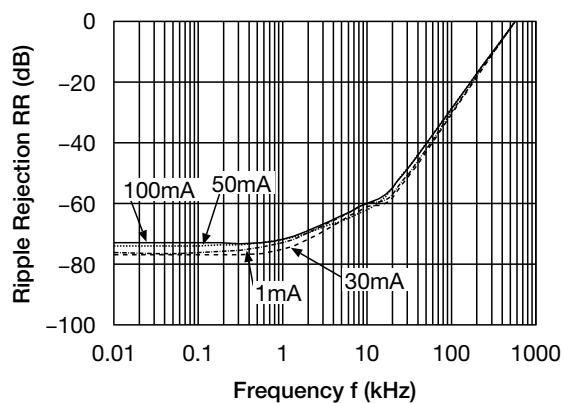





### ESR Stable area

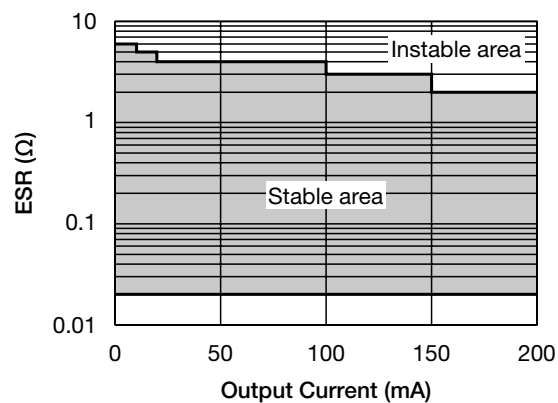


### Current limit

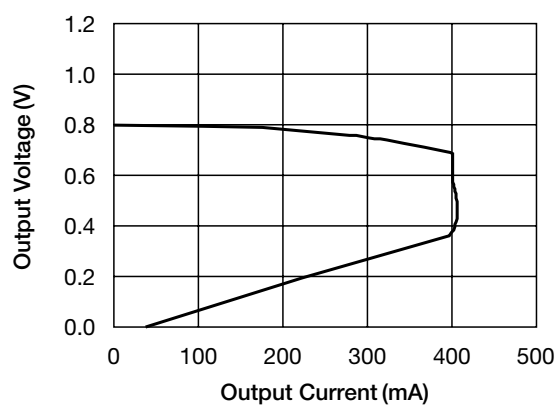


Load transient response ( $V_{DD}=V_O+1V$ ,  $V_{CE}=V_{DD}$ ,  $C_{in}=C_O=1\mu F$ )

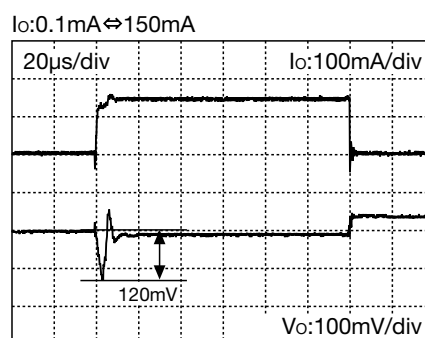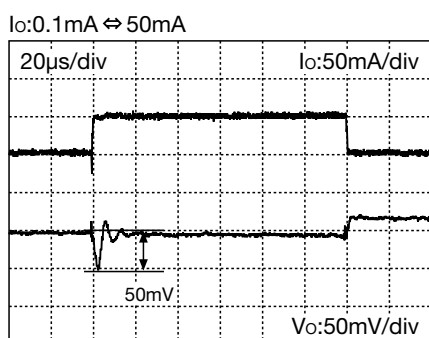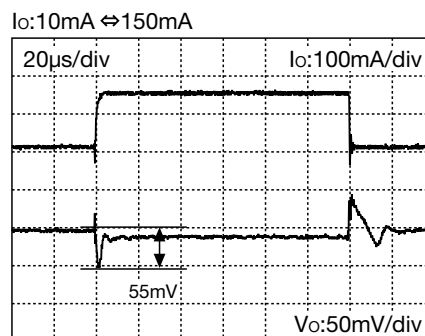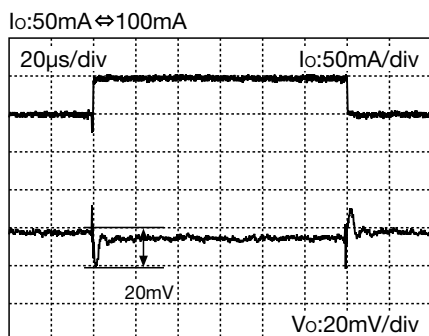

Input rise characteristics  
 ( $V_{DD}=0V \rightarrow 1.8V$ ,  $V_{CE}=V_{DD}$ ,  $I_O=30mA$ )

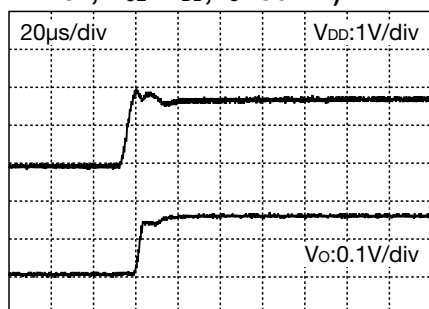


CE rise characteristics  
 ( $V_{DD}=1.8V$ ,  $V_{CE}=0V \rightarrow V_{DD}$ ,  $I_O=30mA$ )

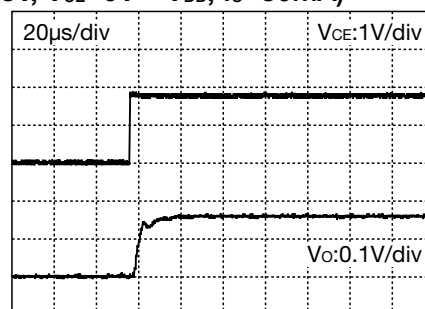


**Characteristics ( $V_o=3.0V$ )** (Except where noted otherwise  $V_{DD}=V_{OUT}(typ.)+1V$ ,  $V_{CE}=V_{DD}$ ,  $T_a=25^{\circ}C$ )


**Output - Input voltage**

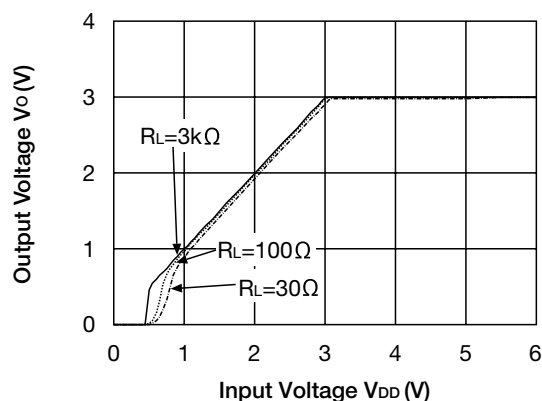


**Input current - Input voltage**

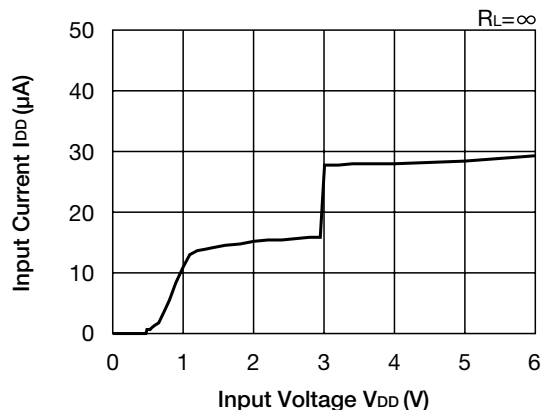


**Load regulation**

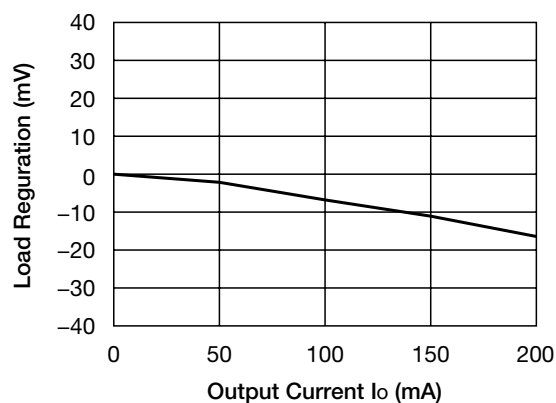


**Line regulation**

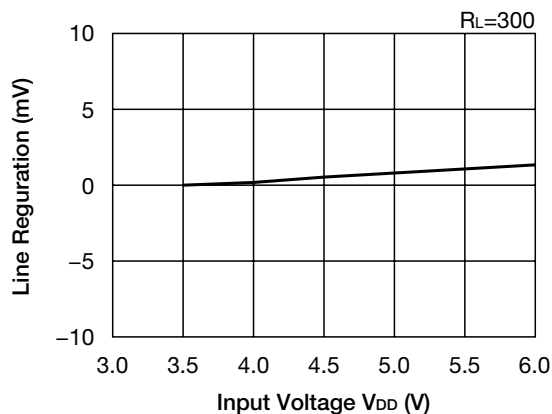


**Dropout voltage**

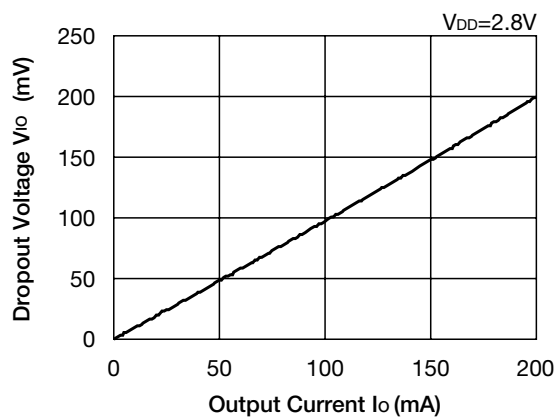


**$V_{OUT}$  temperature coefficient**

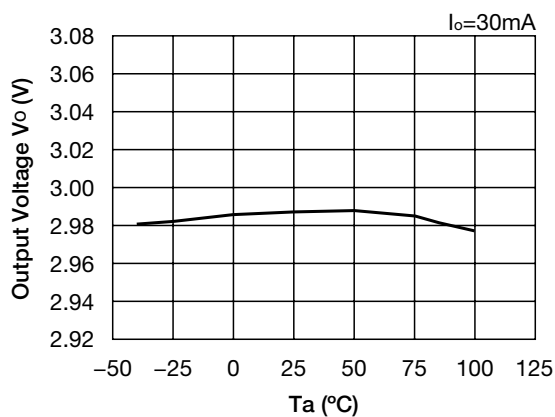


### Ripple Rejection

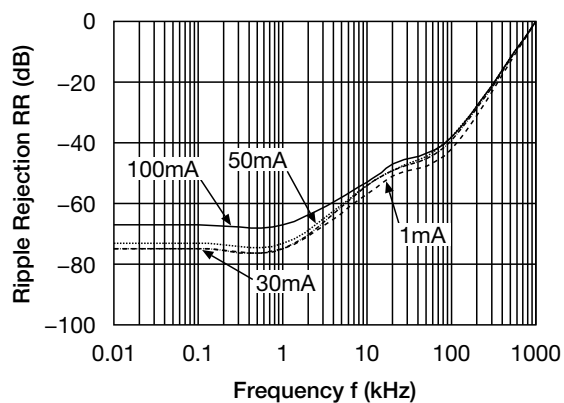





### ESR Stable area

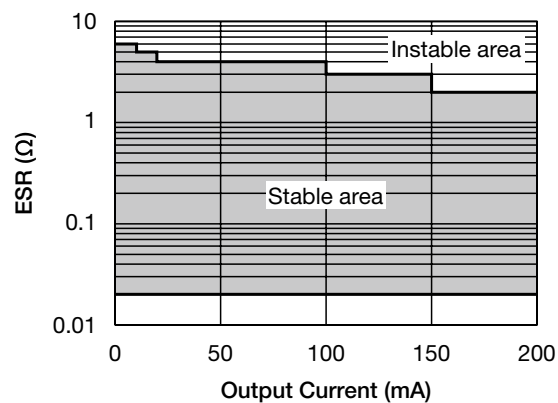


### Current limit

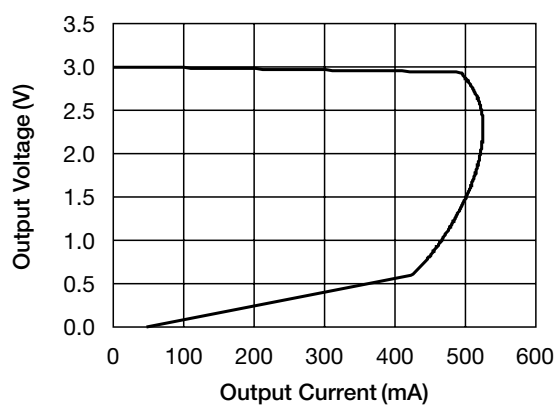


Load transient response ( $V_{DD}=V_O+1V$ ,  $V_{CE}=V_{DD}$ ,  $C_{in}=C_O=1\mu F$ )

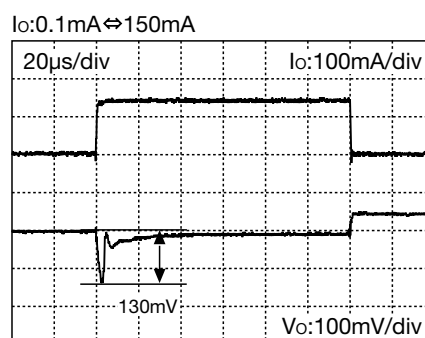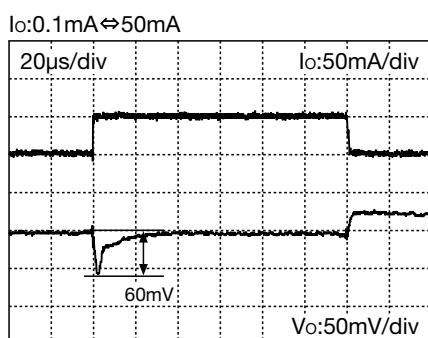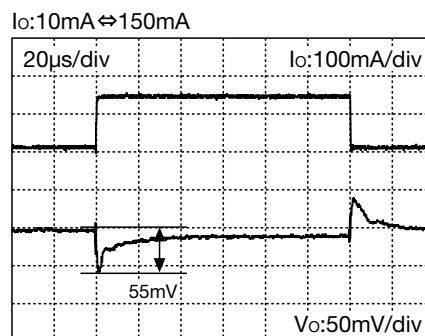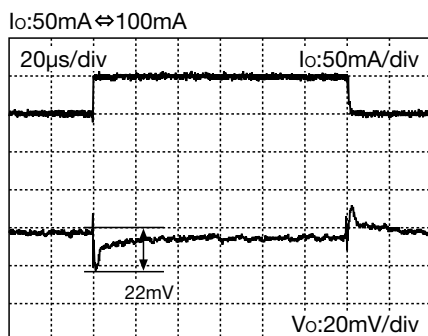

Input rise characteristics  
 ( $V_{DD}=0V \rightarrow 4.0V$ ,  $V_{CE}=V_{DD}$ ,  $I_O=30mA$ )

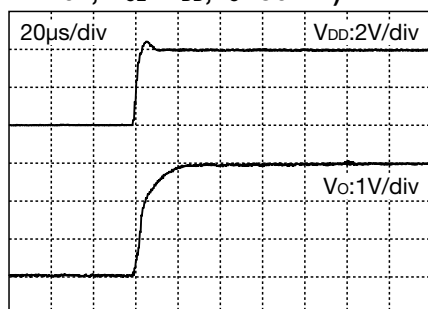


CE rise characteristics  
 ( $V_{DD}=4.0V$ ,  $V_{CE}=0V \rightarrow V_{DD}$ ,  $I_O=30mA$ )

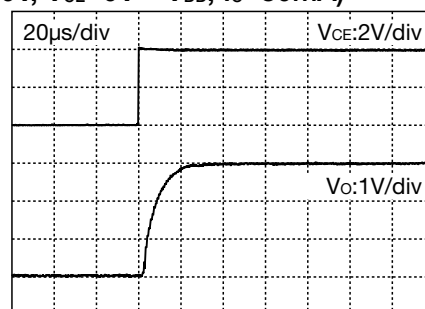


**Characteristics ( $V_o=5.0V$ )** (Except where noted otherwise  $V_{DD}=V_{OUT}(typ.)+1V$ ,  $V_{CE}=V_{DD}$ ,  $T_a=25^{\circ}C$ )


**Output - Input voltage**

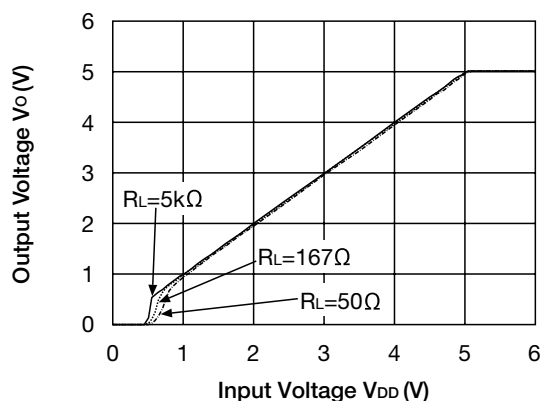


**Input current - Input voltage**

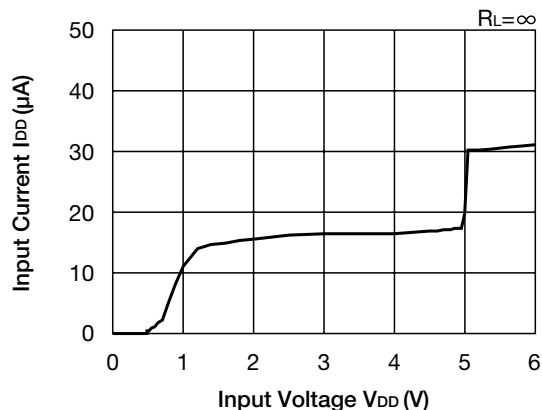


**Load regulation**

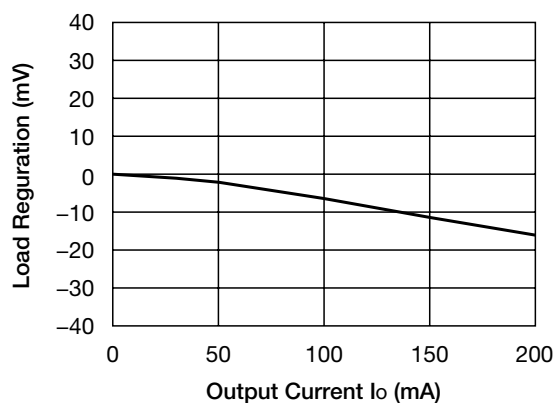


**Line regulation**

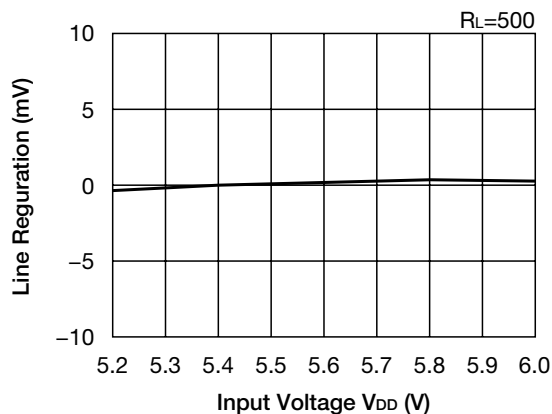


**Dropout voltage**

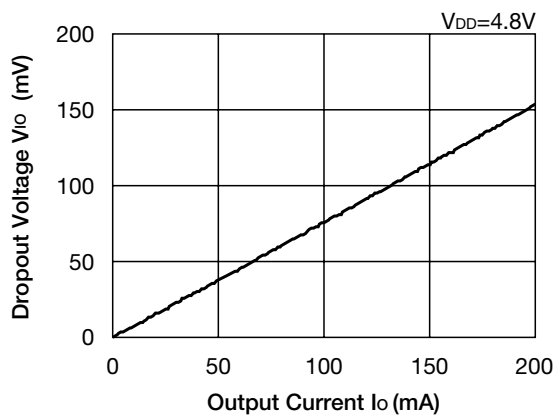


**$V_{OUT}$  temperature coefficient**

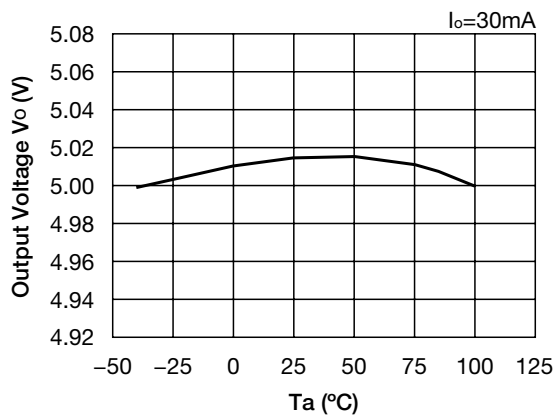


### Ripple Rejection

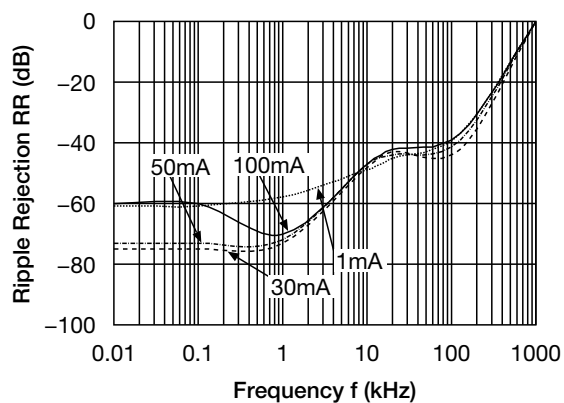





### ESR Stable area

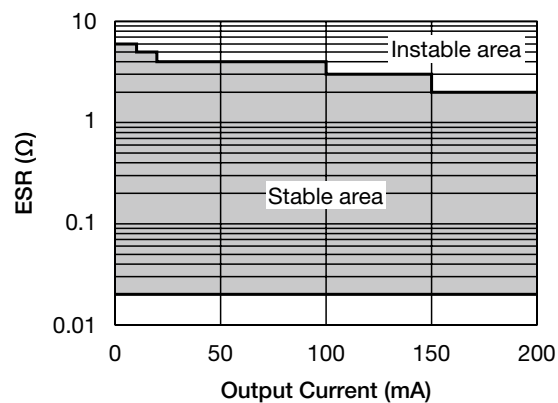


### Current limit

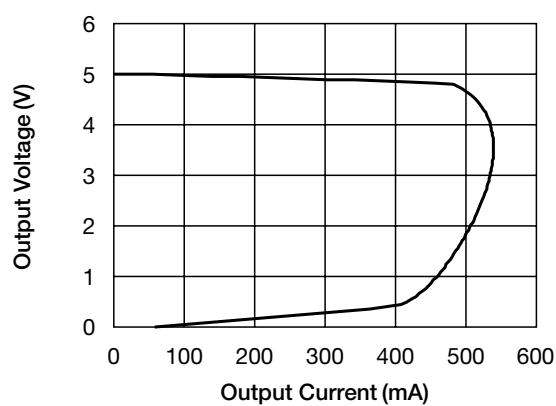

Load transient response ( $V_{DD}=V_O+1V$ ,  $V_{CE}=V_{DD}$ ,  $C_{in}=C_O=1\mu F$ )

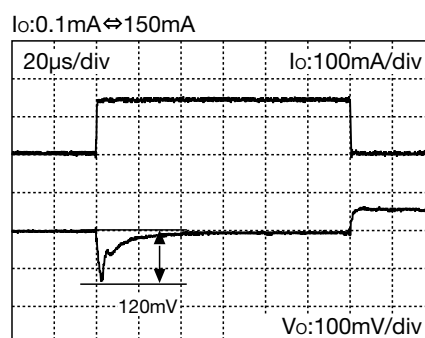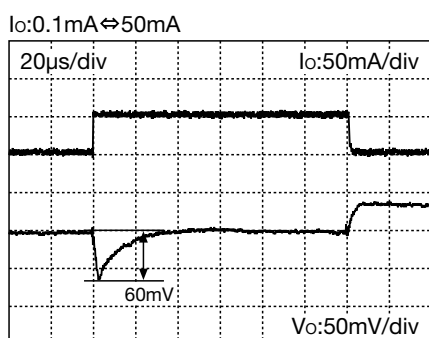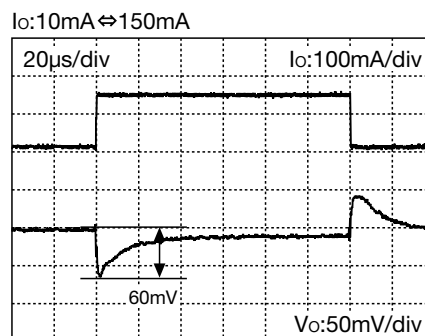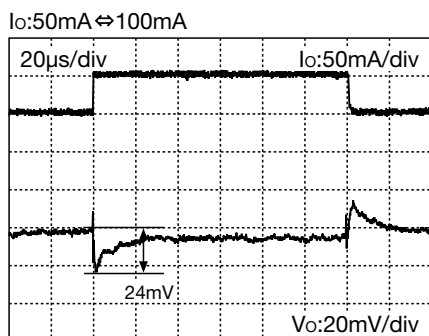

Input rise characteristics  
 ( $V_{DD}=0V \rightarrow 6.0V$ ,  $V_{CE}=V_{DD}$ ,  $I_O=30mA$ )

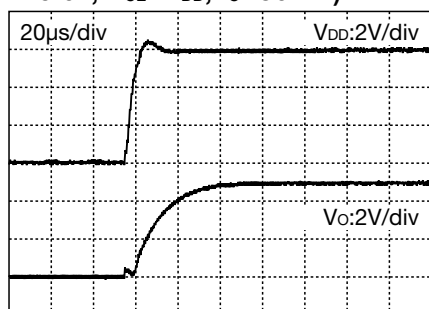

CE rise characteristics  
 ( $V_{DD}=6.0V$ ,  $V_{CE}=0V \rightarrow V_{DD}$ ,  $I_O=30mA$ )

