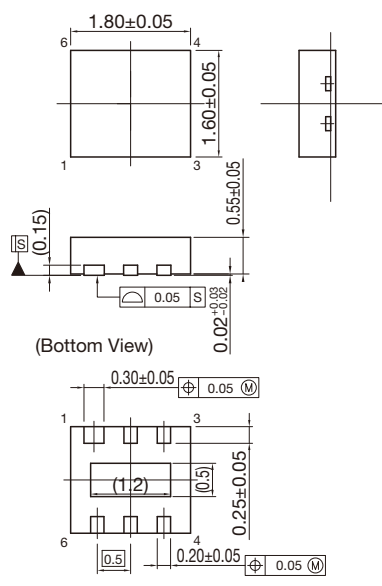

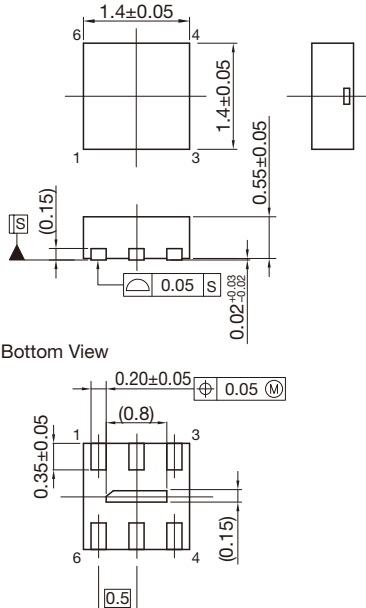



封装

封装名	外形尺寸图	推荐焊盘尺寸图
<p>SSON-6E</p>	 <p>Technical drawing of SSON-6E package showing top, side, and bottom views with dimensions:</p> <ul style="list-style-type: none"> Top View: Overall width 1.80±0.05, overall height 1.60±0.05. Pin positions 1, 3, 4, 6. Side View: Overall height 0.55±0.05, lead height (0.15), lead thickness 0.05, and a 0.02±0.02 chamfer. Bottom View: Pin pitch 0.30±0.05, pin diameter 0.05 (M), lead width 0.25±0.05, lead thickness 0.20±0.05, and a 0.05 (M) feature. 	 <p>Recommended pad dimensions for SSON-6E package:</p> <ul style="list-style-type: none"> Pad width: 0.5 Pad spacing: 0.5 Pad length: 1.2 Pad thickness: 0.45 Lead thickness: 0.55 Lead width: 0.45 Lead spacing: 0.2 Lead thickness: 0.3
<p>SSON-6J</p>	 <p>Technical drawing of SSON-6J package showing top, side, and bottom views with dimensions:</p> <ul style="list-style-type: none"> Top View: Overall width 1.4±0.05, overall height 1.4±0.05. Pin positions 1, 3, 4, 6. Side View: Overall height 0.55±0.05, lead height (0.15), lead thickness 0.05, and a 0.02±0.02 chamfer. Bottom View: Pin pitch 0.20±0.05, pin diameter 0.05 (M), lead width 0.35±0.05, lead thickness 0.20±0.05, and a 0.05 (M) feature. 	 <p>Recommended pad dimensions for SSON-6J package:</p> <ul style="list-style-type: none"> Pad width: 0.5 Pad spacing: 0.5 Pad length: 0.8 Pad thickness: 0.625 Lead thickness: 0.55 Lead width: 0.625 Lead spacing: 0.2 Lead thickness: 0.2