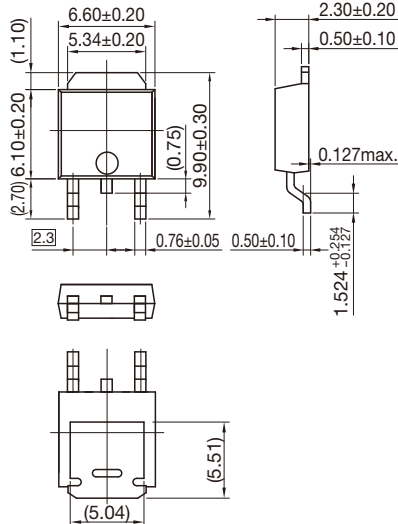

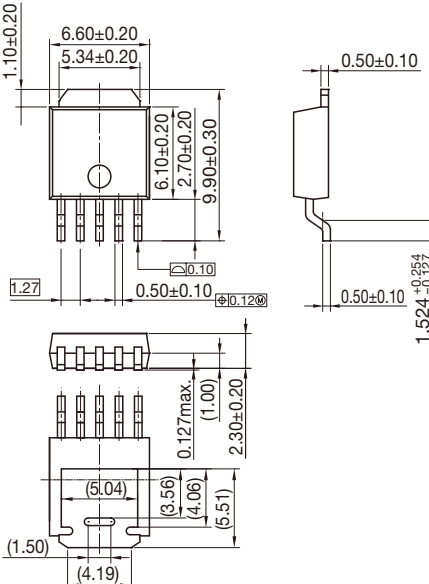



封装

封装名	外形尺寸图	推荐焊盘尺寸图
TO-252C	 Top view dimensions: 6.60±0.20, 5.34±0.20, 2.70, 6.10±0.20, 9.90±0.30, 0.76±0.05, 0.50±0.10, 0.127max., 1.524^{+0.254}_{-0.127}, 2.30±0.20, 0.50±0.10. Side view dimensions: 2.30±0.20, 0.50±0.10, 0.127max., 1.524^{+0.254}_{-0.127}. Bottom view dimensions: 5.51, 5.04.	 Pad dimensions: 6.00, 6.50, 6.25, 3.00, 1.40, 2.30, 4.60.
TO-252-5A	 Top view dimensions: 6.60±0.20, 5.34±0.20, 1.10±0.20, 6.10±0.20, 2.70±0.30, 9.90±0.30, 0.50±0.10, 0.127max., 1.524^{+0.254}_{-0.127}, 0.50±0.10, 1.27, 0.10, 0.127. Side view dimensions: 0.50±0.10, 0.50±0.10, 1.524^{+0.254}_{-0.127}. Bottom view dimensions: 5.51, 5.04, 3.56, 4.06, 4.19, 1.50, 2.30±0.20, 0.127max., 1.00.	 Pad dimensions: 5.34, 5.61, 6.33, 1.92, 0.65, 1.27.