


M10SP-2N

FEATURES

1. Compact size, lightweight and high-output torque.
2. Superior running quietness.

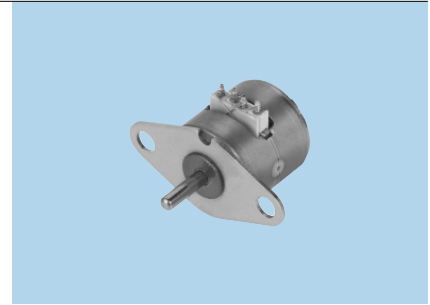


USES

Scanners, mini-printers, multifunction machines.


SPECIFICATIONS

Item	M10SP-2N
Rated Voltage	DC 5V
Working Voltage	DC 4~6V
Rated Current/Phase	0.125mA(Peak)
Coil DC Resistance	10Ω/phase±10%
Step Angle	18° /step
Drive Method	Constant Current
Excitation Method	2-2 Phase excitation(Bipolar driving)
Insulation Class	Class E insulation
Pull-out Torque	0.71mN·m/400pps
Pull-in Torque	0.68mN·m/400pps
Max. Pull-out Pulse Rate	4,100pps
Max. Pull-in Pulse Rate	880pps

CHARACTERISTICS

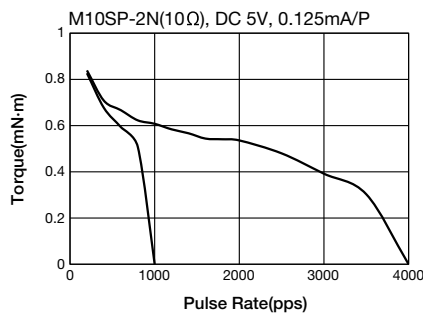

DIMENSIONS

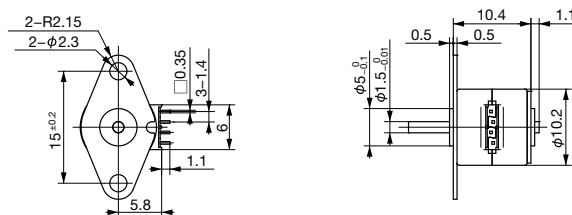

Unit : mm
General tolerance : ±0.5