


Geared Motors

M22E-13G

DC Mini-Motors

APPLICATIONS

- Door Lock
- Electric Bed


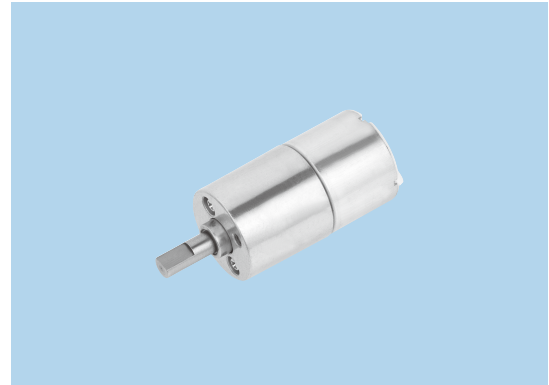


SPECIFICATIONS


Items	Reduction Ratio			
	1/29	1/67	1/100	1/120
Rated Voltage	6.0V			
Voltage Range	4.5~6.0V			
Rated Load	98mN·m	196mN·m	196mN·m	196mN·m
No Load Speed	198rpm	88rpm	58rpm	48rpm
No Load Current	100mA			
Starting Torque	430mN·m or more	880mN·m or more	1460mN·m or more	1780mN·m or more
Rotation	CW/CCW			

*Characteristics can be customized.

CHARACTERISTICS

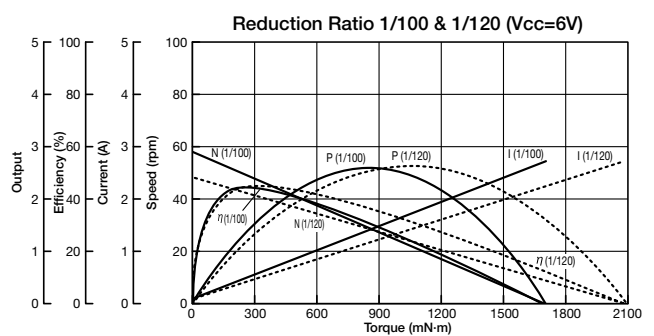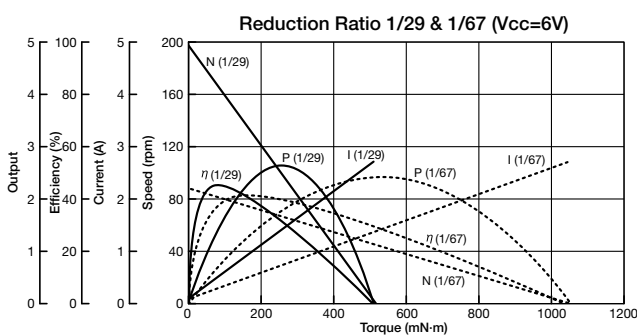

DIMENSIONS

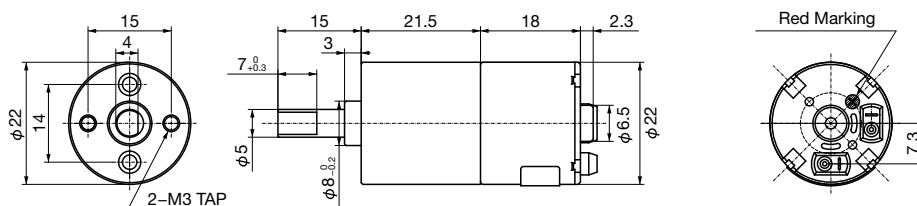

Unit : mm

• Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
 • The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.