


LEDドライバー一体型電源 液晶TV用 LED Driver Integrated Power Supply For Liquid Crystal Television SRV2249 Series

Adaptors, Chargers/Switching Power Supplies

特長 / FEATURES

1. LEDバックライト駆動回路内蔵。
2. PWM調光、DC調光の各種調光方式に対応。
3. 各回路に制御、保護回路を施した安全設計。
4. 16～24インチクラスに対応。
5. ワールドワイド対応可能。

1. Internal LED backlight drive circuit.
2. Supporting various lighting control systems. (PWM, DC type etc)
3. Safety design with control and protection circuits in each circuit.
4. Supporting 16~24 inch class.
5. Worldwide support.

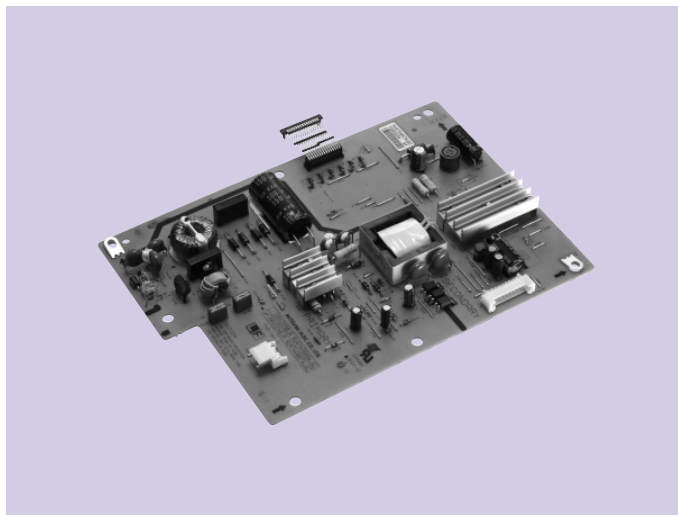

用途 / USES

1. 液晶TV
1. Liquid Crystal Television.

ブロック図 / BLOCK DIAGRAM

小型・低消費電力 /


Compact, less power consumption



仕様 / SPECIFICATIONS

項目/Item	仕様/Specifications	
機種名/Models	SRV2249 JA	
仕向地/Destination	単入力 or WW入力対応可能/Supporting single or worldwide input	
入力電圧/Input Voltage	AC 100~240V	
出力電圧/Output Voltage	電源部/Power Supply	12V typ 2.2A
	LED部/LED	5V typ 0.1A
待機消費電力/Stand by Power Consumption	各種カスタム対応/Can be customized	
消費電力/Power Consumption	0.1W以下/0.1W less than	
環境条件/Environmental Condition	動作温度/Operating Temperature	-10 ~ 60℃
	保存温度/Storage Temperature	-40 ~ 80℃

外形図 / DIMENSIONS

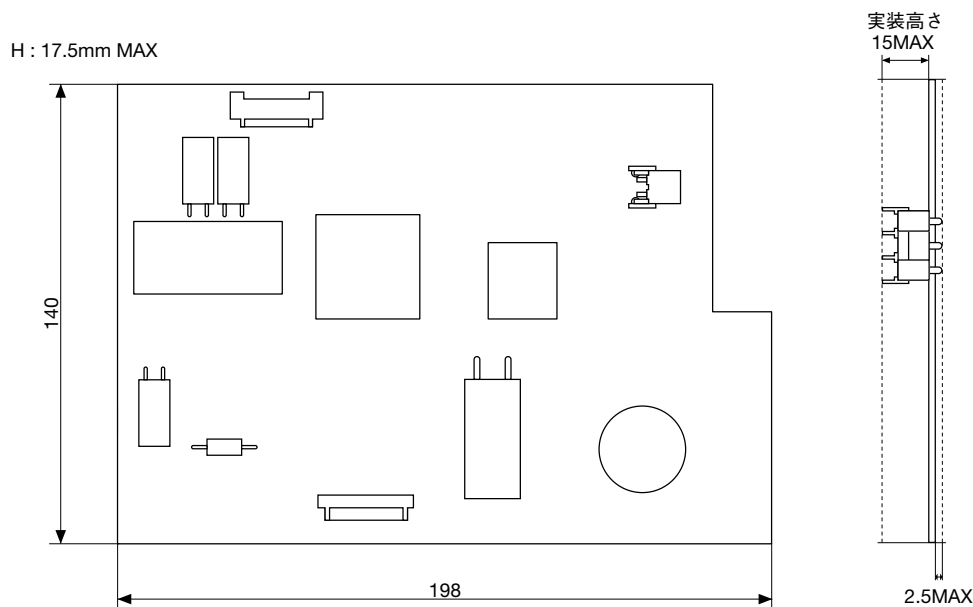

Unit : mm

- ※ 部品搭載 MAX 高さ : 15mm
- ※ Equipped with parts MAX height : 15mm